



Professional LED Commercial Lighting



APP

Kam's Light Co., Limited.

Web: www.kamsled.com

ADD: 6/F, Building B, Fuzhen Technologies Park, Fuyuan 2nd Road,
Fuyong, Bao'an District, Shenzhen, China.

TEL: 86-755-2163 5132 / 8661 2715 FAX: 86-755-2661 2120

Email: sales@kamsled.com



Lighting up our future!

KAM'S LIGHT CO., LIMITED

2017-I



CONTENT

Recessed Downlight

CL-13 Series

P01-02



Wall Washer Spotlight

CL-20 Series

P03-04



CL-03/04 Series

P05-06



CL-15 Series

P07-08



CL-23 Series

P09-10



CL-05 Series

P11-12



CL-25 Series

P13-14



Beam Angle zoomable Spotlight

CL-21 Series

P15-16



KAS-CL13R-T



KAS-CL13R-F




KAS-CL22R




KAS-CL20R




KAS-CL03R




KAS-CL04R




KAS-CL15R-S



KAS-CL15R-E




KAS-CL15R-Q



KAS-CL15R-O



KAS-CL19R-O



KAS-CL23-S



KAS-CL23-E



KAS-CL23-Q



KAS-CL23-O



KAS-CL05R-S



KAS-CL05R-E



KAS-CL05R-O



KAS-CL05R-P



KAS-CL19R-P



KAS-CL25R-T



KAS-25R-F




KAS-CL21R

Recessed Downlight

CL-08-M Series

P17-18



KAS-CL08R-M-A



KAS-CL08R-M-B

CL-28-M Series

P19-20



KAS-CL28R-M-3



KAS-CL28R-M-4

CL-11/12-M Series

P21-22



KAS-CL11R-M



KAS-CL12R-M

CL-08 Series

P23-24



KAS-CL08R-2



KAS-CL08R-3



KAS-CL08R-4



KAS-CL08R-5

CL-28 Series

P25-26



KAS-CL28-3




KAS-CL28-4

CL-06/07 Series

P27-28



KAS-CL06R



KAS-CL07R

CL-17/18 Series

P29-30



KAS-CL17R



KAS-CL18R

CONTENT

Recessed Downlight

DL-03-D Series

P31-32 IP65



DL-03-R Series

IP65



DL-03-L Series



DL-DL01 Series

P33-34



DL-DL02D Series

P35-36



DL-15 Series

P37-38



DL-16 Series

P39-40



BU 02-03 IP67

P41-42



KAS-DL03-D-3/4



KAS-DL03-D-6/8



KAS-DL03-R-3/4



KAS-DL03-R-6/8



KAS-DL03-L-3/4



KAS-DL03-L-6/8



KS-DL01-R2-3/4



KS-DL01-R2-6/8




KS-DL01-D2-3/4




KS-DL01-D2-6/8




KS-DL02-D



KAS-DL15R-B



KAS-DL15-A



KAS-DL15-B




KAS-DL16-A



KAS-DL16-B



KAS-BU02-03



KAS-BU02-03

Track Light

TL-13 Series

P43-44



KAS-TL13R-A



KAS-TL13R-D

TL-11 Series

P45-46



KAS-TL11R-A



KAS-TL11R-A




KAS-TL11R-A

TL-10 Series

P47-48



KAS-TL10R-A



KAS-TL10R-D



KAS-TL10R-C

TL-10-B Series

P49-50



KAS-TL10R-B

TL-15 Series

P51-52



KAS-TL15-A



KAS-TL15-D



KAS-TL15-C

TL-16 Series

P53-54



KAS-TL16-A



KAS-TL16-B

TL-18 Series

P55-56



KAS-TL18-A



KAS-TL18-B



KAS-TL18-C



KAS-TL18-D

TL-17 Series

P57-58



KAS-TL17

CONTENT

Track Light

TL-08 Series P59-60



KAS-TL08R-A



KAS-TL08R-A

TL-09 Series P61-62



KAS-TL09R-A



KAS-TL09R-A


TL-03 Series P63-64



KAS-TL03R-D




KAS-TL03R-C




KAS-TL03R-B

TL-03-S Series P65-66



KAS-TL03R-D-S



KAS-TL03R-C-S



KAS-TL03R-B-S

TL-03-H Series P67-68



KAS-TL03R-D-H



KAS-TL03R-C-H



KAS-TL03R-B-H


TL-19 Series P69-70



KAS-TL19-A

GT Series Grille Light

BL-03 Series P71-72



KAS-BL03R-Single



KAS-BL03R-Two



KAS-BL03R-Three

BL-10 Series P73-74



KAS-BL10R-Single



KAS-BL10R-Two



KAS-BL10R-Three

BL-12 Series P75-76



KAS-BL12R-Single



KAS-BL12R-Two




KAS-BL12R-Three

BL-11 Series P75-76



KAS-BL11R-Single



KAS-BL11R-Two

GD Series Adjustable Light

DL-17 Series P77-78



KAS-DL17

DL-05/18/08 Series P79-80



KAS-DL18R



KAS-DL05R




KAS-DL08R

CONTENT


Mounted Downlight

PL01 Series


P81-82




KAS-PL01



KAS-PL01




KAS-PL01




KAS-PL01

MD03R

P83-84



KAS-MD03R



KAS-MD03R

Mounted Downlight

MD02D

P83-84



90°



KS-MD02D-A



KS-MD02D-B

MD02R

P83-84



60°



KS-MD02R-A



KS-MD02R-B

MD05R

P85-86



KAS-MD05R

SL Series Strip Light

KS-SS

P87-88



120°



KS-SS



120°



KS-SH

H-Wall Serties

BU01-04

P89-90




90°



KS-BU01



90°



KS-BU04

SL Module Series

AR 01

MR 16

P91-92



KAS-AR01S




KAS-MR16



CL13 Series Downlight

High power COB downlight and high brightness with double reflector design, shares with you the shining light and gorgeous feeling without glare.

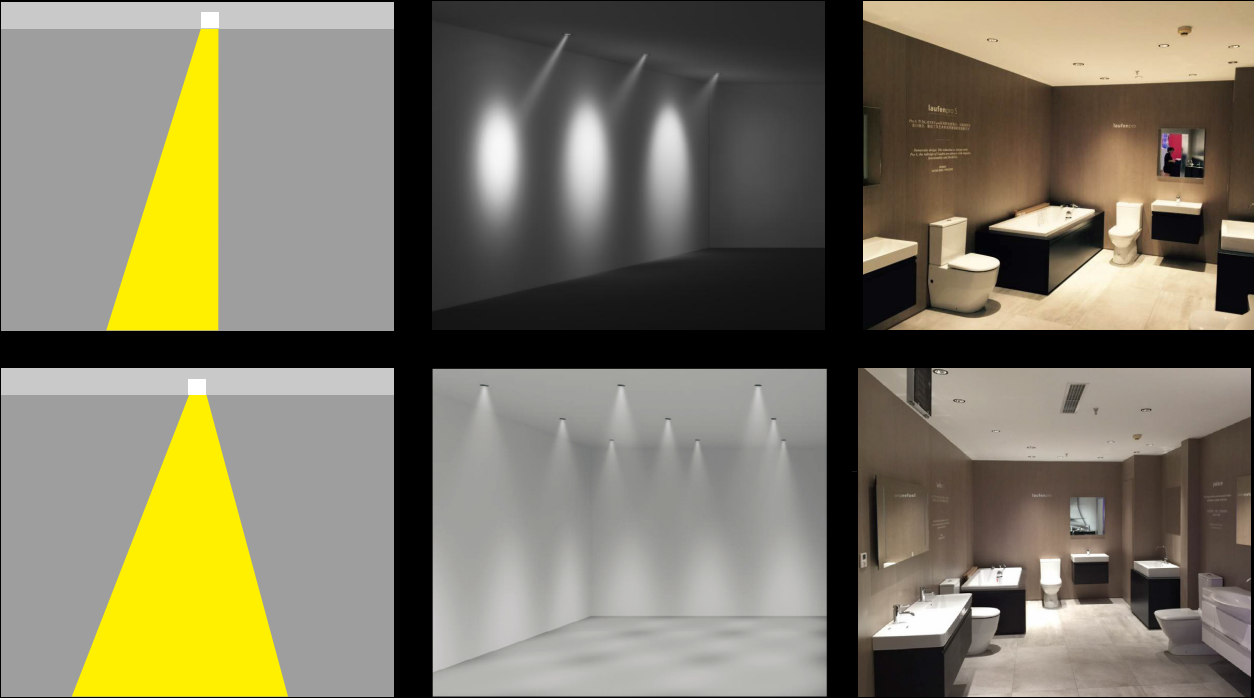

Model	KAS-CL13R-3F	KAS-CL13R-4F
LED Chip	CITIZEN	CITIZEN
LED Power	8W/10W/15W	15W/20W/25W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/24°/36°/60°	10°/15°/24°/36°/60°
Size	95mm*125mm	130mm*165.5mm
Cutout	⌀ 85mm	⌀ 120mm

Model	KAS-CL13R-3T	KAS-CL13R-4T
LED Chip	CITIZEN	CITIZEN
LED Power	8W/10W/15W	15W/20W/25W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/24°/36°/60°	10°/15°/24°/36°/60°
Size	95mm*125mm	130mm*165.5mm
Cutout	⌀ 85mm	⌀ 120mm



Model	KAS-CL13R-5F	KAS-CL13R-6F
LED Chip	CITIZEN	CITIZEN
LED Power	15W/20W/25W	30W/40W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/24°/36°/60°	15°/24°/30°/36°/45°
Size	160mm*165mm	180mm*180mm
Cutout	⌀ 150mm	⌀ 170mm

Model	KAS-CL13R-5T	KAS-CL13R-6T
LED Chip	CITIZEN	CITIZEN
LED Power	15W/20W/25W	30W/40W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/24°/36°/60°	15°/24°/30°/36°/45°
Size	160mm*165mm	180mm*180mm
Cutout	⌀ 150mm	⌀ 170mm


Option

Finish	Dim Type	Lighting Efficiency
Body	-TRIAC	Normal:65-85lm/w
Outer Ring	-0-10V	Custom:90-100lm/w
Reflector	-1-10V	
	-DALI	
	-Others	



CL-20 Wall Washer Spotlight

Paralleled light up the wall corner, lighting rang without dead angle between wall and ceiling.
Excellent lighting performance
Professional optical lens, higher lumen efficiency
application for Museum/Gallery/Showroom/Market/Shop etc.

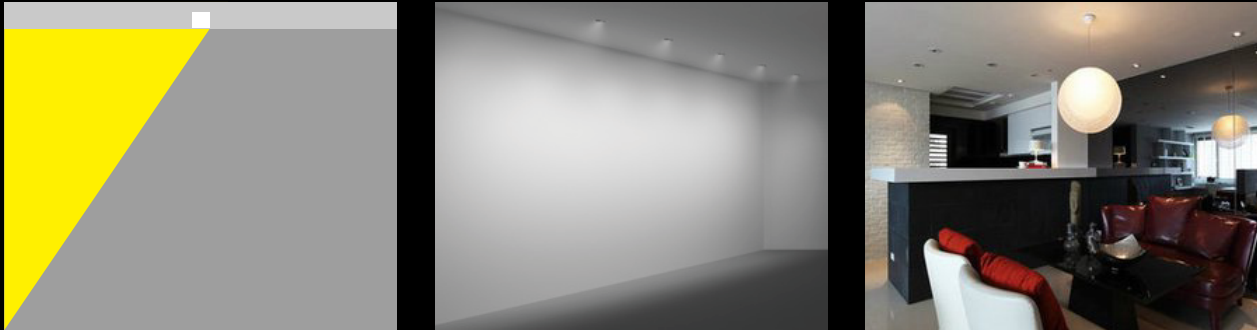

Model	KAS-CL22-3
LED Chip	CITIZEN
LED Power	10W
CCT	2700-4000K
CRI	Ra > 80/90
Size	100mm*96.5mm
Cutout	90mm







Model	KAS-CL20-4
LED Chip	CITIZEN
LED Power	20W
CCT	2700-4000K
CRI	Ra > 80/90
Size	130mm*113mm
Cutout	120mm

Option		
Finish	Dim Type	Lighting Efficiency
Body	-TRIAC -0-10V -1-10V -DALI -Others	Nomal:65-85lm/w Custom:90-100lm/w




CL-0304 Series Downlight

High power COB downlight and high brightness with double reflector design, shares with you the shining light and gorgeous feeling without glare.

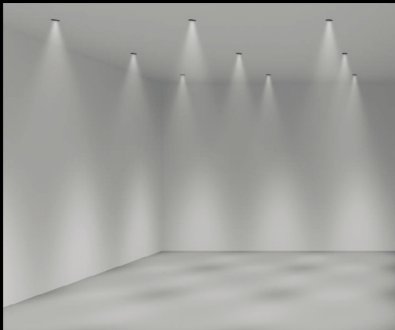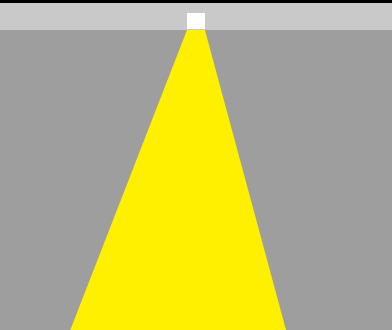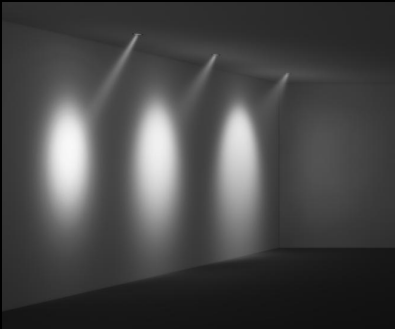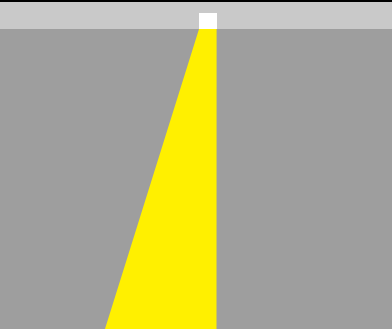

Model	KAS-CL03R-3	KAS-CL03R-4	KAS-CL03R-4
LED Chip	CREE	CREE	CREE
LED Power	8W/15W	15W/20W	25W
CCT	2700K-4000K	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	96mm*117mm	130mm*142mm	130mm*153mm
Cutout	85mm	120mm	120mm

Model	KAS-CL04R-3	KAS-CL04R-4	KAS-CL04R-4
LED Chip	CREE	CREE	CREE
LED Power	8W/15W	15W/20W	25W
CCT	2700K-4000K	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	96mm*117mm	130mm*142mm	130mm*153mm
Cutout	85mm	120mm	120mm




Model	KAS-CL03R-6	KAS-CL03R-8
LED Chip	CREE	CREE
LED Power	30W/40W	30W/40W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°/45°	15°/24°/30°/36°/45°
Size	175mm*187mm	205mm*192mm
Cutout	170mm	195mm

Model	KAS-CL04R-6	KAS-CL04R-8
LED Chip	CREE	CREE
LED Power	30W/40W	30W/40W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°/45°	15°/24°/30°/36°/45°
Size	175mm*187mm	205mm*192mm
Cutout	170mm	195mm

Option

Finish




Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others



Lighting Efficiency

Normal:70-80lm/w
Custom:90-100lm/w

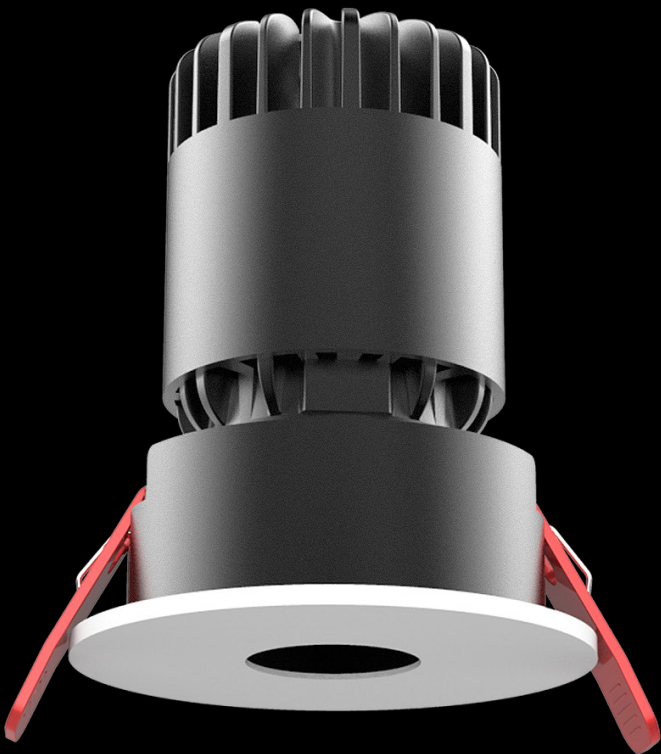


CL-15 Series Pinhole Downlight


Concise appearance and one-piece structure design, looks elegant and generous. Professional designed light distribution offers you soft and comfortable light.

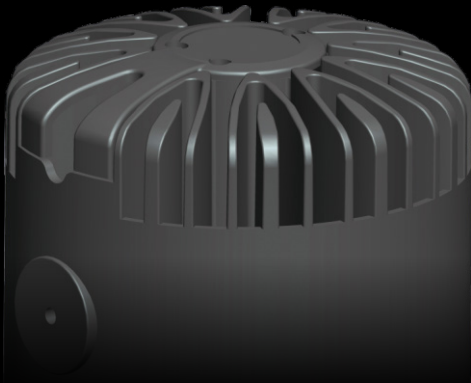

Model	KAS-CL15R-S F
LED Chip	CREE
LED Power	10W/15W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°
Size	90mm*112mm
Cutout	75mm




Model	KAS-CL15R-E T
LED Chip	CREE
LED Power	10W/15W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°
Size	90mm*112mm
Cutout	75mm







Model	KAS-CL15R-Q T
LED Chip	CREE
LED Power	10W/15W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°
Size	90mm*112mm
Cutout	75mm



Model	KAS-CL15R-O T
LED Chip	CREE
LED Power	10W/15W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°
Size	90mm*112mm
Cutout	75mm




Model	KAS-CL19R-O-3
LED Chip	CREE
LED Power	10W/15W
CCT	2700-4000K
CRI	Ra>80/90
Beam Angle	15°/24°/30°/36°
Size	90mm*112mm
Cutout	75mm-80mm

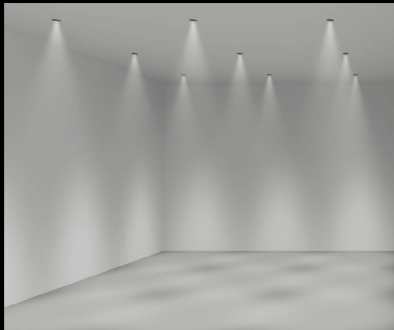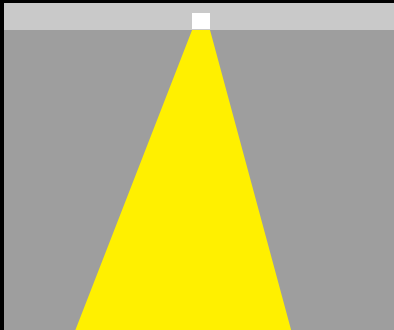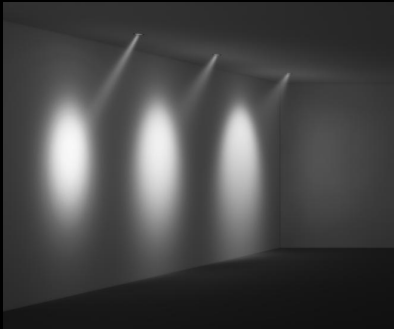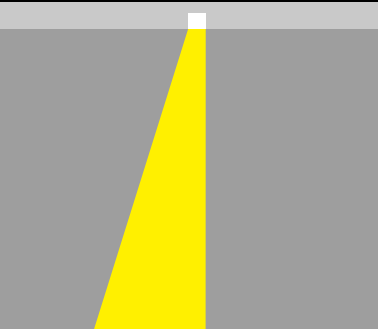

Option

Finish




Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others





Lighting Efficiency

Normal: 50-70lm/w
Custom: 75-85lm/w

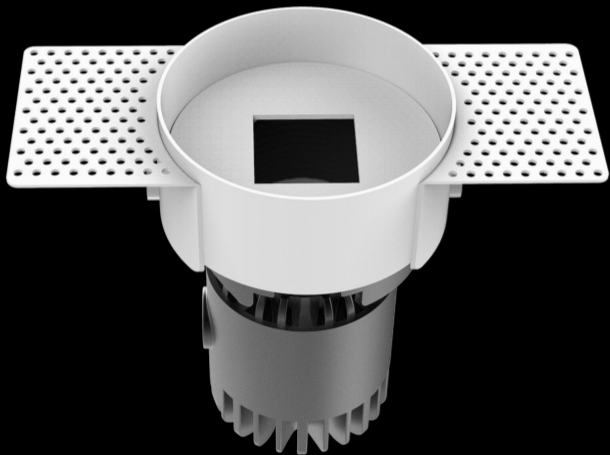


CL-23 Series Pinhole Downlight

Concise appearance and one-piece structure design, looks elegant and generous. Professional designed light distribution offers you soft and comfortable light.

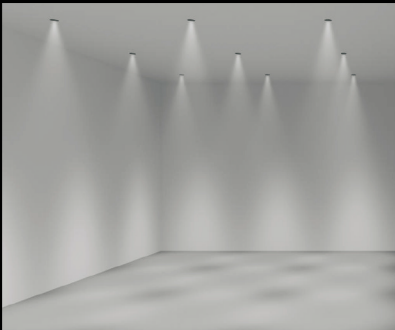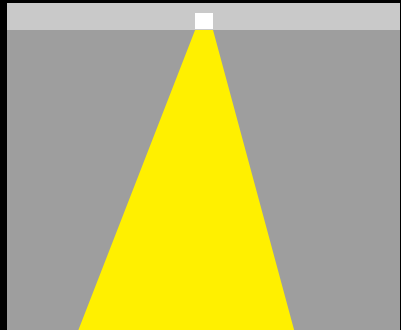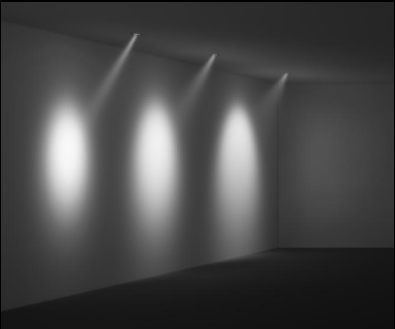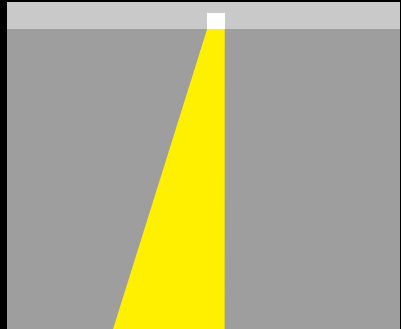

Model	KAS-CL23-S F	KAS-CL23-S T
LED Chip	CREE	CREE
LED Power	10W/15W	10W/15W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	164mm*60mm*132.5mm	164mm*60mm*132.5mm
Cutout	90mm	90mm

Model	KAS-CL23-E F	KAS-CL23-E T
LED Chip	CREE	CREE
LED Power	10W/15W	10W/15W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	164mm*60mm*132.5mm	164mm*60mm*132.5mm
Cutout	90mm	90mm

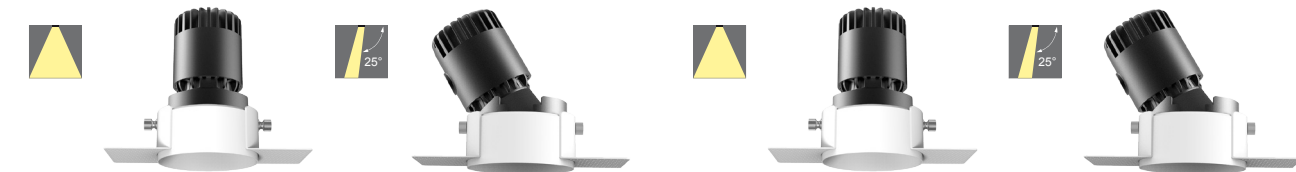


Model	KAS-CL23-Q F	KAS-CL23-Q T
LED Chip	CREE	CREE
LED Power	10W/15W	10W/15W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	164mm*60mm*132.5mm	164mm*60mm*132.5mm
Cutout	90mm	90mm

Model	KAS-CL23-O F	KAS-CL23-O T
LED Chip	CREE	CREE
LED Power	10W/15W	10W/15W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	164mm*60mm*132.5mm	164mm*60mm*132.5mm
Cutout	90mm	90mm

Option

Finish



Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others


Lighting Efficiency

Normal:50-70lm/w
Custom:75-85lm/w



CL-05 Series Pinhole Downlight

Concise appearance and one-piece structure design, looks elegant and generous. Professional designed light distribution offers you soft and comfortable light.

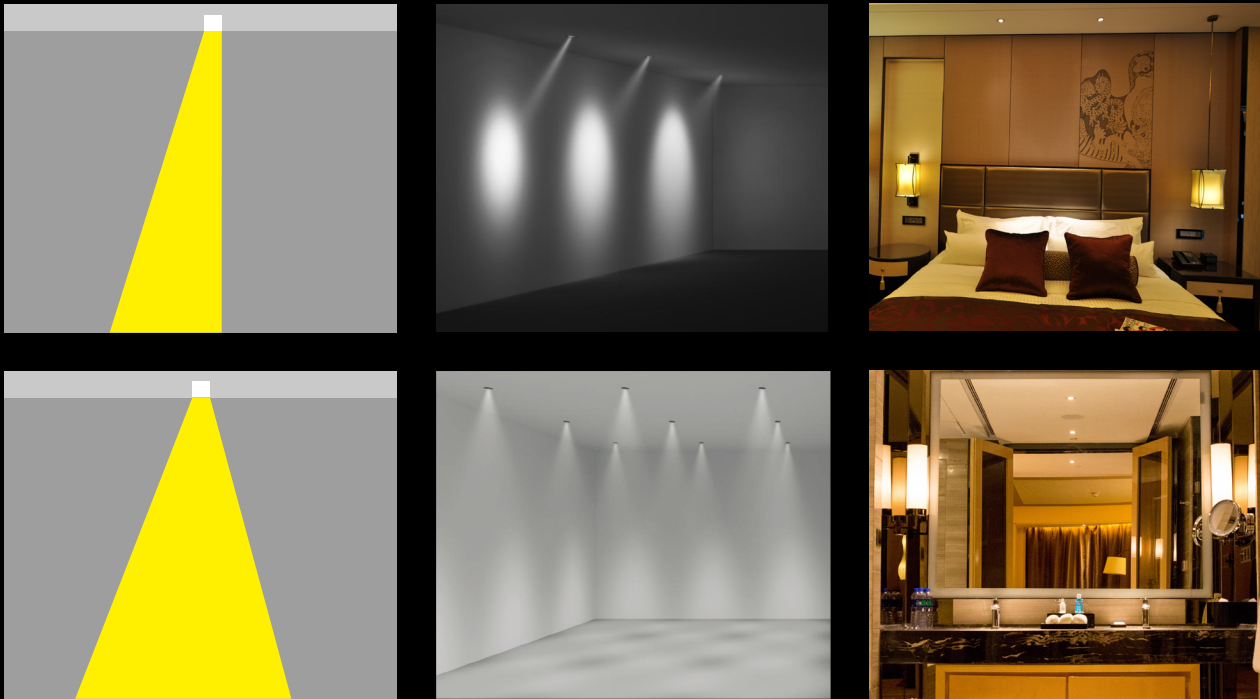

Model	KAS-CL05R-S-3	KAS-CL05R-S-4	KAS-CL05R-S-4
LED Chip	CREE	CREE	CREE
LED Power	8W/10W	15W/20W	25W
CCT	2700-4000K	2700-4000K	2700-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	90mm*100mm	118mm*119mm	118mm*130mm
Cutout	80mm-85mm	105mm-110mm	105mm-110mm

Model	KAS-CL05R-E-3	KAS-CL05R-E-4	KAS-CL05R-E-4
LED Chip	CREE	CREE	CREE
LED Power	8W/10W	15W/20W	25W
CCT	2700-4000K	2700-4000K	2700-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	90mm*100mm	118mm*119mm	118mm*130mm
Cutout	80mm-85mm	105mm-110mm	105mm-110mm



Model	KAS-CL05R-O-3	KAS-CL05R-O-4	KAS-CL05R-O-4
LED Chip	CREE	CREE	CREE
LED Power	8W/10W	15W/20W	25W
CCT	2700-4000K	2700-4000K	2700-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	90mm*100mm	118mm*119mm	118mm*130mm
Cutout	80mm-85mm	105mm-110mm	105mm-110mm

Model	KAS-CL05R-P-3	KAS-CL05R-P-4	KAS-CL05R-P-4
LED Chip	CREE	CREE	CREE
LED Power	8W/10W	15W/20W	25W
CCT	2700-4000K	2700-4000K	2700-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	90mm*100mm	118mm*119mm	118mm*130mm
Cutout	80mm-85mm	105mm-110mm	105mm-110mm



IP42



Model	KAS-CL19R-P-3
LED Chip	CREE
LED Power	10W/15W
CCT	2700-4000K
CRI	Ra>80/90
Beam Angle	15°/24°/30°/36°
Size	90mm*112mm
Cutout	75mm-80mm

Option

Finish



Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others

Lighting Efficiency

Normal:50-65lm/w



CL-25 Small Spotlight

Full aluminum material, high efficiency heat dissipation, delicate exterior design. With fixed and tiltable options, tiltable angle with $\pm 30^\circ$. Beam angle: 12° 18° 24° 30° . Wattage: 3W-5W. With professional optical lens, higher lumen efficiency. Application: Star Hotel/Shop/Home/Apartment



Model	KAS-CL25-2F
LED Chip	CREE
LED Power	3W/5W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/25°/30°/40°
Size	50mm*52mm
Cutout	45mm



Model	KAS-CL25-2T
LED Chip	CREE
LED Power	3W/5W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/25°/30°/40°
Size	50mm*52mm
Cutout	45mm

Option

Finish

Body   

Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others


Lighting Efficiency

Normal: 50-65lm/w



Beam Angle Zoomable Spot Light

Beam angle adjustable: 10°-40°, accurate zoomable 360 degree horizontal rotation direction, more extensive application scope. Professional optical lens, Higher lumen efficiency, focus lighting with excellent performance
Application: Museum/ Gallery/ Bars/ Nightclube / Exhibition Room/Shop etc

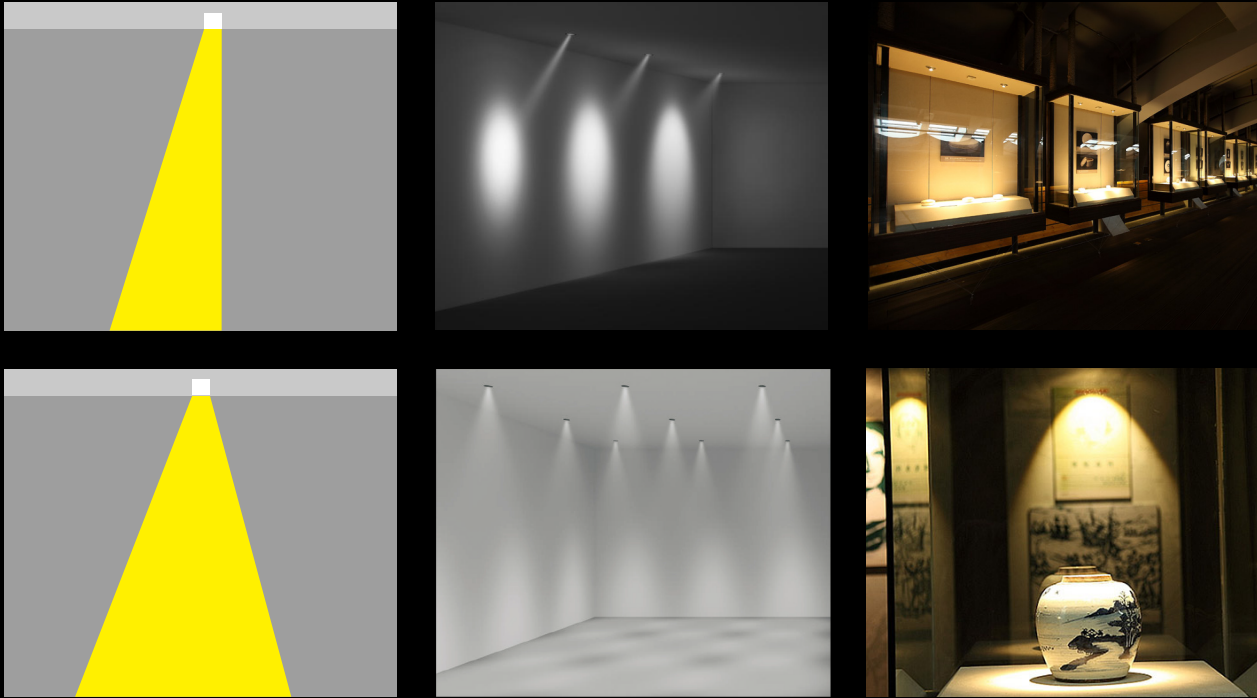

Model	KAS-CL21
LED Chip	CREE
LED Power	3W/5W
CCT	2700-4000K
CRI	Ra > 80/90
Beam Angle	10°~40°
Size	74mm*64mm
Cutout	65mm

Option

Finish



Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others


Lighting Efficiency

Normal:65-85lm/w
Custom:90-100lm/w



CL-08 Series Downlight

350° Rotatable Delicate&Considerate Design, with Excellent Lighting Performance, Perfect for Modern Style.
Making Your Space Harmonious and Comfortable.

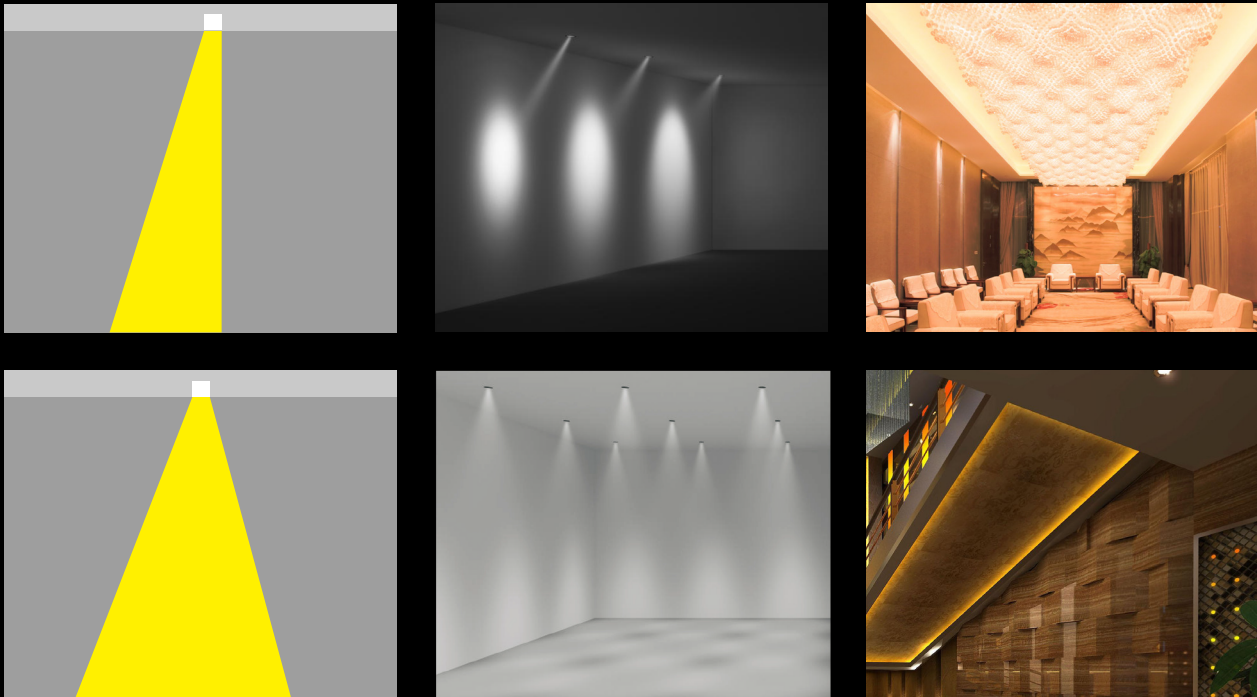

Model	KAS-CL08R-M-A-3	KAS-CL08R-M-A-4
LED Chip	CREE	CREE
LED Power	10W	15W/20W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°
Size	78mm*88mm	110mm*105.5mm
Cutout	70mm-74mm	100mm-105mm



Model	KAS-CL08R-M-B-3	KAS-CL08R-M-B-4
LED Chip	CREE	CREE
LED Power	10W	15W/20W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°
Size	90mm*87mm	120mm*103mm
Cutout	80mm-85mm	110mm-115mm



Model	KAS-CL08R-M-A-4
LED Chip	CREE
LED Power	30W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	15°/20°/30°/36°/45°
Size	110mm*116mm
Cutout	100mm-105mm



Model	KAS-CL08R-M-B-4
LED Chip	CREE
LED Power	30W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	15°/20°/30°/36°/45°
Size	120mm*114mm
Cutout	110mm-115mm

Option

Finish



Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others





Lighting Efficiency

Normal:65-85lm/w
Custom:85-95lm/w



CL-28-M Series Downlight

Recessed downlight series , optional size 3" and 4". Aluminum profile lamp body, good heat dissipation. With lens, optimizing the lighting effect, beam angle 15°/26°/36°/40° for 3" version and 15°/24°/40° for 4" version. Wide power range from 5W to 30W, adjustable and gimble design for diversified demands.

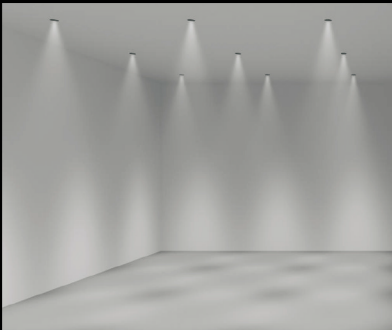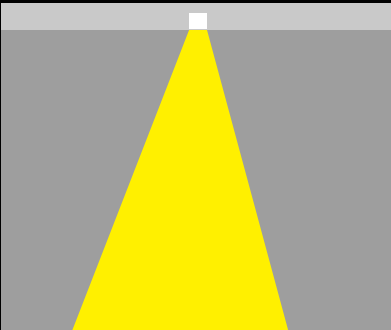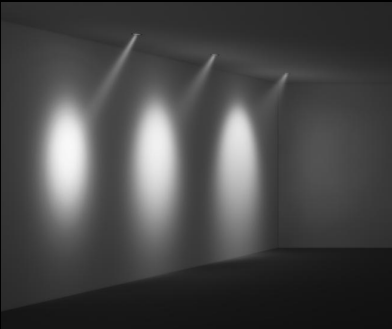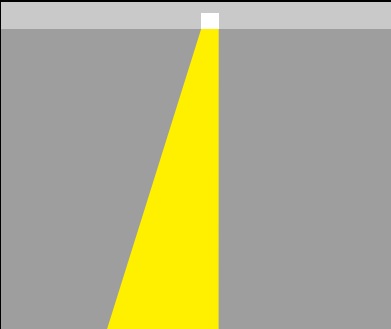

Model	KAS-CL28-M-3
LED Chip	CREE CITIZEN
LED Power	5W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/26°/36°/40°
Size	86mm*65mm
Cutout	80mm

Model	KAS-CL28-M-3
LED Chip	CREE CITIZEN
LED Power	10W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/26°/36°/40°
Size	86mm*83mm
Cutout	80mm



Model	KAS-CL28-M-4
LED Chip	CITIZEN
LED Power	15W/20W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/40°
Size	118mm*83mm
Cutout	110mm

Model	KAS-CL28-M-4
LED Chip	CITIZEN
LED Power	30W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/40°
Size	118mm*103mm
Cutout	110mm

Option		
Finish	Dim Type	Lighting Efficiency
Body   	-TRIAC -0-10V -1-10V -DALI -Others	Normal:50-65lm/w



CL-11 12 Series Spotlight

350° Rotatable Delicate&Considerate Design, with Excellent Lighting Performance, Perfect for Modern Style. Making Your Space Harmonious and Comfortable.



Model	KAS-CL11R-M-3	KAS-CL11R-M-4
LED Chip	CREE	CREE
LED Power	10W	15W/20W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°
Size	100mm*100mm	140mm*117mm
Cutout	85mm-90mm	120mm-130mm



Model	KAS-CL12R-M-3	KAS-CL12R-M-4
LED Chip	CREE	CREE
LED Power	10W	15W/20W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°
Size	100mm*100mm*100mm	140mm*140mm*117mm
Cutout	85mm*85mm	120mm*120mm



Model	KAS-CL11R-M-4
LED Chip	CREE
LED Power	30W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	15°/20°/30°/36°/45°
Size	140mm*126mm
Cutout	120mm-130mm

Model	KAS-CL12R-M-4
LED Chip	CREE
LED Power	30W
CCT	2700K-4000K
CRI	Ra>80/90
Beam Angle	15°/20°/30°/36°/45°
Size	140mm*140mm*128mm
Cutout	120mm*120mm

Option

Finish



Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others


Lighting Efficiency

Normal:65-85lm/w
Custom:90-100lm/w



CL-08 Series Downlight

Special shining lights is the characteristic of this flat face ring downlight series. Combining different sizes in one uniform style, meets your multiple demands.

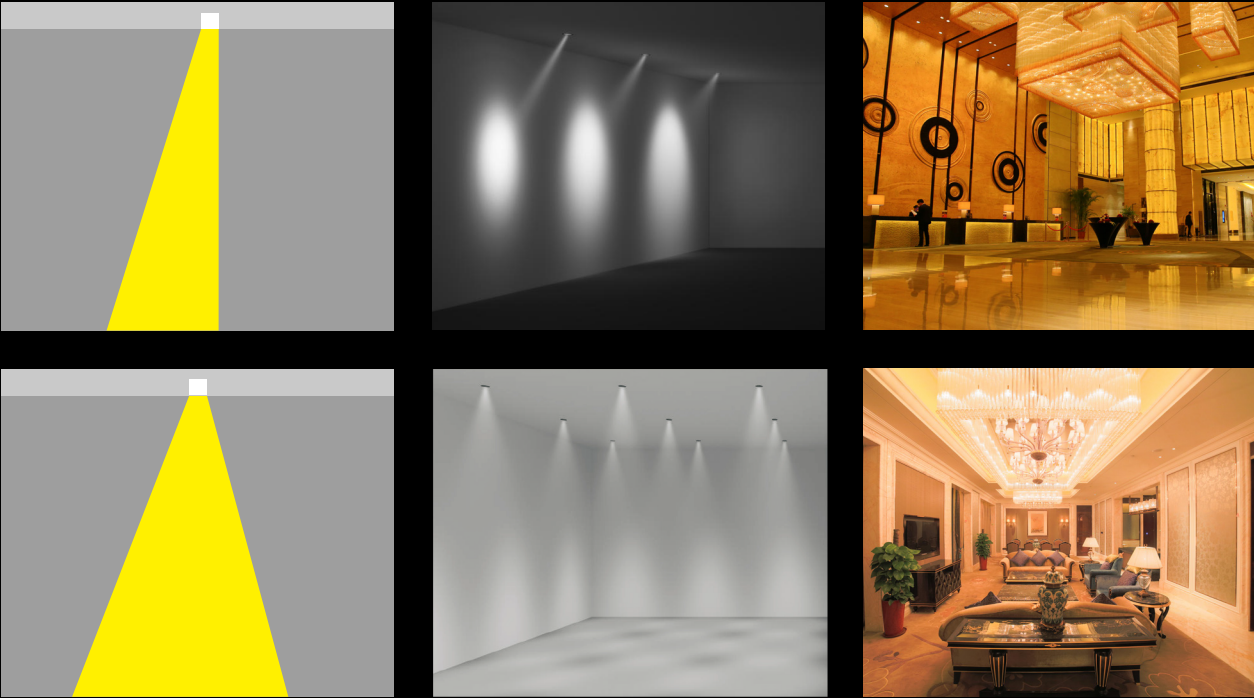











Model	KAS-CL08R-2F	KAS-CL08R-2T
LED Chip		
LED Power	5W/8W/10W	5W/8W/10W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	65mm*79mm	75mm*79mm
Cutout	 55mm	 60mm









Model	KAS-CL08R-4F	KAS-CL08R-4T
LED Chip		
LED Power	15W/20W	15W/20W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°/60°	15°/24°/30°/36°/60°
Size	102mm*97mm	120mm*98mm
Cutout	 90mm	 110mm









Model	KAS-CL08R-5F	KAS-CL08R-5T
LED Chip		
LED Power	30W/40W	30W/40W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°/45°	15°/24°/30°/36°/45°
Size	145mm*116mm	162mm*116mm
Cutout	 130mm	 145mm











Model	KAS-CL08R-3F	KAS-CL08R-3T
LED Chip		
LED Power	8W/10W	8W/10W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	75mm*84mm	85mm*84mm
Cutout	 65mm	 75mm













Model	KAS-CL08R-4F	KAS-CL08R-4T
LED Chip		
LED Power	30W	30W
CCT	2700K-4000K	2700K-4000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	15°/20°/30°/36°/45°	15°/20°/30°/36°/45°
Size	102mm*108mm	120mm*110mm
Cutout	 90mm	 110mm

Option		
Finish		Dim Type
Body		-TRIAC
Outer Ring		-0-10V
		-1-10V
		-DALI
		-Others
		Lighting Efficiency
		Normal:65-85lm/w
		Custom:90-100lm/w



CL-28 Series Downlight

Recessed downlight series , optional size 3" and 4". Aluminum profile lamp body, good heat dissipation. With lens, optimizing the lighting effect, beam angle 15°/26°/36°/40° for 3" version and 15°/24°/40° for 4" version. Wide power range from 5W to 30W, adjustable design for diversified demands.

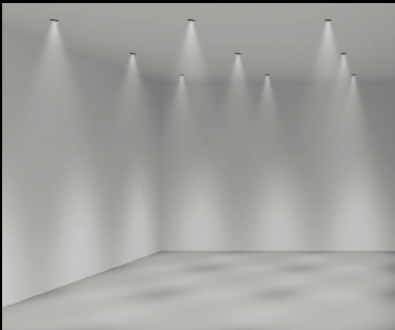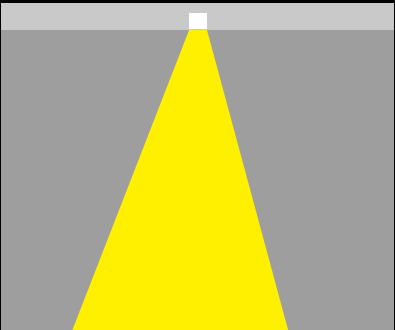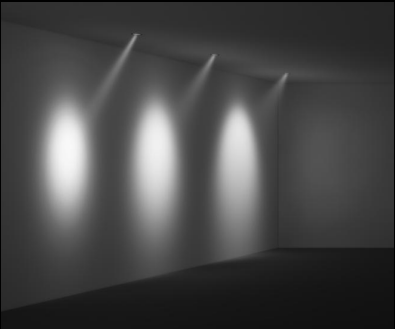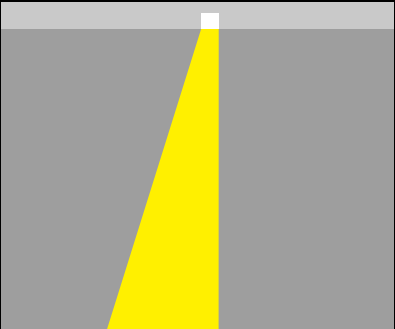

Model	KAS-CL28-3
LED Chip	CREE CITIZEN
LED Power	5W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/26°/36°/40°
Size	78mm*65mm
Cutout	70mm



Model	KAS-CL28-3
LED Chip	CREE CITIZEN
LED Power	10W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/26°/36°/40°
Size	78mm*83mm
Cutout	70mm



Model	KAS-CL28-4
LED Chip	CITIZEN
LED Power	15W/20W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/40°
Size	108mm*83mm
Cutout	100mm







Model	KAS-CL28-4
LED Chip	CITIZEN
LED Power	30W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/40°
Size	108mm*103mm
Cutout	100mm

Option		
Finish	Dim Type	Lighting Efficiency
Body	-TRIAC -0-10V -1-10V -DALI -Others	Normal:50-65lm/w




CL-0607 Series Downlight


Round and Square shape design ,meet your diversified demand and your indoor lighting design styles.

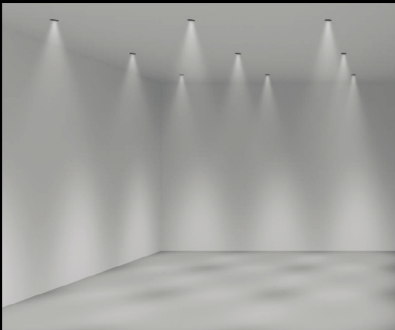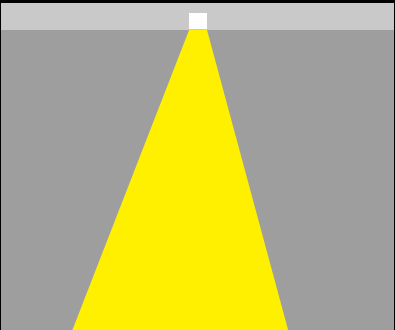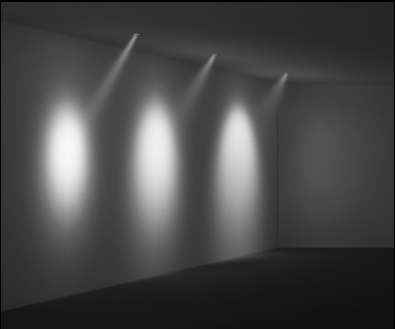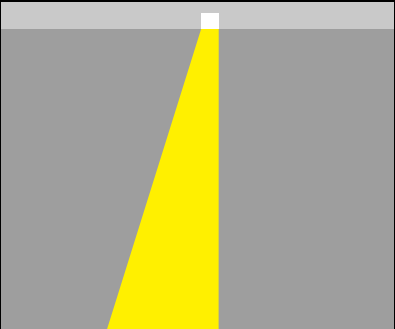


Model	KAS-CL06R-3F	KAS-CL06R-3T
LED Chip	CREE	CREE
LED Power	8W/10W	8W/10W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	90mm*100mm	90mm*100mm
Cutout	80mm-85mm	80mm-85mm

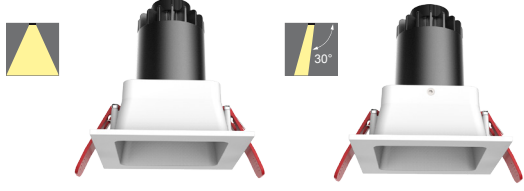

Model	KAS-CL07R-3F	KAS-CL07R-3T
LED Chip	CREE	CREE
LED Power	8W/10W	8W/10W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	90mm*90mm*100mm	90mm*90mm*100mm
Cutout	80mm*80mm	80mm*80mm

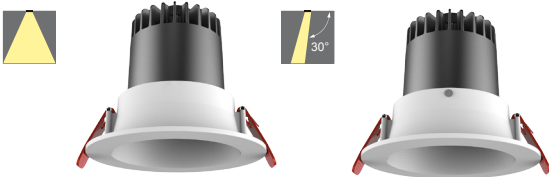

Model	KAS-CL06R-4F	KAS-CL06R-4F	KAS-CL06R-4T	KAS-CL06R-4T
LED Chip	CREE	CREE	CREE	CREE
LED Power	15W/20W	30W	15W/20W	30W
CCT	2700K-4000K	2700K-4000K	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	130mm*119mm	130mm*130mm	130mm*119mm	130mm*130mm
Cutout	105mm-110mm	105mm-110mm	105mm-110mm	105mm-110mm

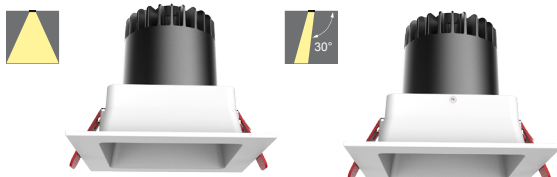

Model	KAS-CL07R-4F	KAS-CL07R-4F	KAS-CL07R-4T	KAS-CL07R-4T
LED Chip	CREE	CREE	CREE	CREE
LED Power	15W/20W	30W	15W/20W	30W
CCT	2700K-4000K	2700K-4000K	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	130mm*130mm*119mm	130mm*130mm*130mm	130mm*130mm*119mm	130mm*130mm*130mm
Cutout	105mm*105mm	105mm*105mm	105mm*105mm	105mm*105mm

Option

Finish



Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others






Lighting Efficiency

Normal:65-85lm/w
Custom:90-100lm/w



Trimless Downlight

Trimless version downlight intergrates the light as a unit with the ceiling, illuminating the art of lighting and high taste, high-end-ed lighting demands. Performance,durability and versatility feature this sophisticated version with invisible ring.

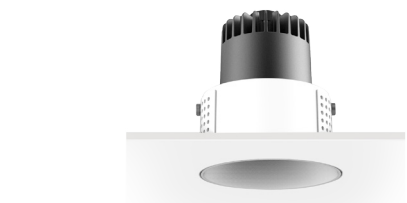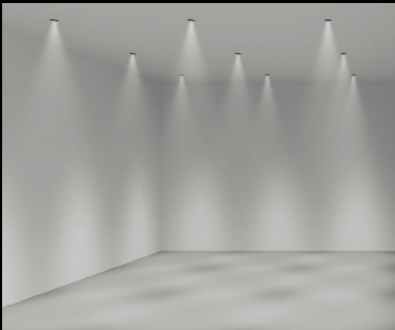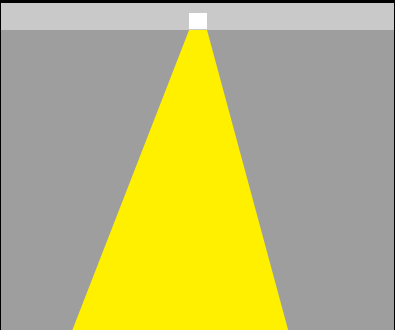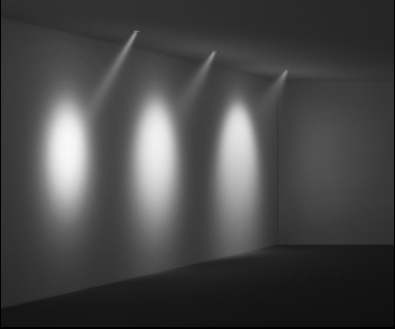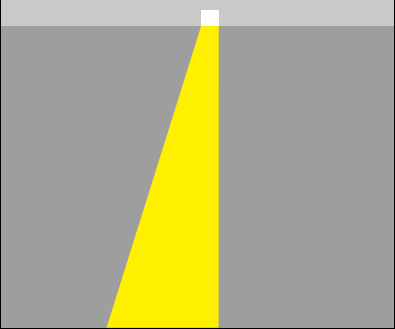

Model	KAS-CL17R-3F	KAS-CL17R-3T
LED Chip	CREE	CREE
LED Power	10W	10W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	117mm*70.5mm*103mm	117mm*70.5mm*103mm
Cutout	82mm	82mm

Model	KAS-CL18R-3F	KAS-CL18R-3T
LED Chip	CREE	CREE
LED Power	10W	10W
CCT	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°
Size	133mm*71mm*103mm	133mm*71mm*103mm
Cutout	72mm*72mm	72mm*72mm




Model	KAS-CL17R-4F	KAS-CL17R-4F	KAS-CL17R-4T	KAS-CL17R-4T
LED Chip	CREE	CREE	CREE	CREE
LED Power	15W/20W	30W	15W/20W	30W
CCT	2700K-4000K	2700K-4000K	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	156.5mm*101mm*113mm	156.5mm*101mm*125mm	156.5mm*101mm*113mm	156.5mm*101mm*125mm
Cutout	112mm	112mm	112mm	112mm

Model	KAS-CL18R-4F	KAS-CL18R-4F	KAS-CL18R-4T	KAS-CL18R-4T
LED Chip	CREE	CREE	CREE	CREE
LED Power	15W/20W	30W	15W/20W	30W
CCT	2700K-4000K	2700K-4000K	2700K-4000K	2700K-4000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	162mm*100mm*122mm	162mm*100mm*125mm	162mm*100mm*122mm	162mm*100mm*125mm
Cutout	102mm*102mm	102mm*102mm	102mm*102mm	102mm*102mm

Option

Finish



Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others





Lighting Efficiency

Normal:65-85lm/w
Custom:90-100lm/w


IP65

DL-03 Series Downlight



Size : 3" 4" 6" 8". Wattage: 5-40W. Beam angle: 34°/36°/38°/60°/90°. IP65 available. Various optical option: SMD with high lumen version/COB anti-glare version/Smaller beam angle lens version) Application: Market / Exhibition Room/ Bars/ Shop/ Museum/Gallery/ office building etc

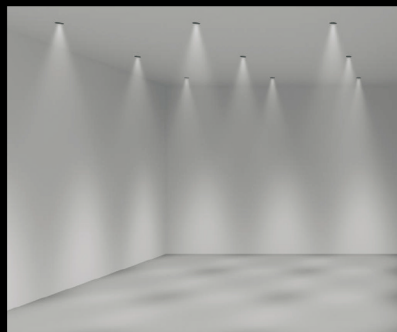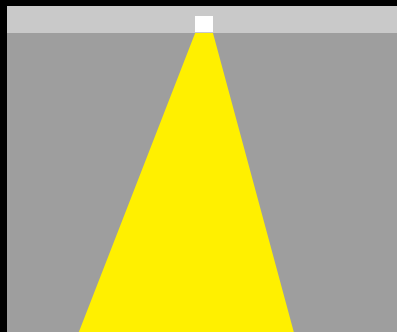

Model	KAS-DL03-L-3	KAS-DL03-L-4	KAS-DL03-L-6	KAS-DL03-L-8
LED Chip	CREE CITIZEN	CREE CITIZEN	CREE CITIZEN	CREE CITIZEN
LED Power	5W/9W	15W/20W	20W/30W	30W/40W
CCT	3000K-4000K	3000K-4000K	3000K-4000K	3000K-4000K
CRI	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90
Beam Angle	34°	38°	36°	36°
Size	103mm*58mm	144mm*66mm	182mm*80mm	226mm*93mm
Cutout	90mm	125mm-135mm	160mm-175mm	200mm-215mm



Model	KAS-DL03-R-3	KAS-DL03-R-4	KAS-DL03-R-6	KAS-DL03-R-8
LED Chip	CREE CITIZEN	CREE CITIZEN	CREE CITIZEN	CREE CITIZEN
LED Power	5W/9W	15W/20W	20W/30W	30W/40W
CCT	3000K-4000K	3000K-4000K	3000K-4000K	3000K-4000K
CRI	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90
Beam Angle	60°	60°	60°	60°
Size	103mm*58mm	144mm*71mm	182mm*80mm	226mm*96mm
Cutout	90mm	125mm-135mm	160mm-175mm	200mm-215mm



Model	KAS-DL03-D-3	KAS-DL03-D-4	KAS-DL03-D-6	KAS-DL03-D-8
LED Chip	SAMSUNG	SAMSUNG	SAMSUNG	SAMSUNG
LED Power	5W/9W	15W/20W	20W/30W	30W/40W/50W
CCT	3000K-6500K	3000K-6500K	3000K-6500K	3000K-6500K
CRI	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90
Beam Angle	90°	90°	90°	90°
Size	103mm*58mm	144mm*71mm	182mm*80mm	226mm*96mm
Cutout	90mm	125mm-135mm	160mm-175mm	200mm-215mm

Option

Finish

Body

Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others



Lighting Efficiency

Normal: 80-85lm/w
Custom: 90-110lm/w



DL-DL01 Series Downlight

Kams light makes your life more colorful.
Your demand is our pursuit.
1. The luminaire impresses by an attractive but simple design and easy installation.
2. The anti-dazzle design offers a comfort able and desirable lighting environment.

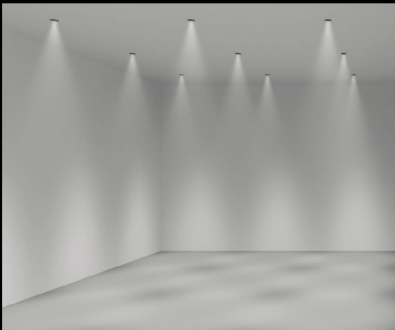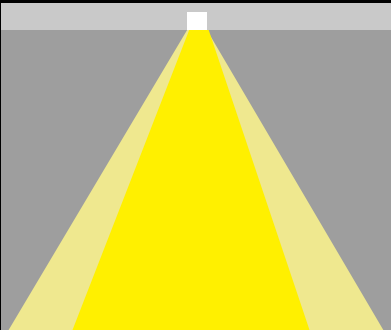

Model	KS-DL01-R2-3	KS-DL01-R2-4
LED Chip	CREE	CREE
LED Power	9W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	60°	60°
Size	110mm*53mm	145mm*69mm
Cutout	90mm-95mm	125mm-130mm



Model	KS-DL01-D2-3	KS-DL01-D2-4
LED Chip	SAMSUNG	SAMSUNG
LED Power	7W/9W/12W/15W	9W/12W/15W/20W
CCT	3000K-6000K	3000K-6000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	90°	90°
Size	110mm*53mm	145mm*69mm
Cutout	90mm-95mm	125mm-130mm



Model	KS-DL01-R2-6	KS-DL01-R2-8
LED Chip	CREE	CREE
LED Power	15W/20W/30W	20W/30W/40W
CCT	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	60°	60°
Size	190mm*86mm	230mm*99mm
Cutout	165mm-170mm	200mm-210mm



Model	KS-DL01-D2-6	KS-DL01-D2-8
LED Chip	SAMSUNG	SAMSUNG
LED Power	12W/15W/20W/30W	20W/30W/40W
CCT	3000K-6000K	3000K-6000K
CRI	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	90°	90°
Size	190mm*86mm	230mm*99mm
Cutout	165mm-170mm	200mm-210mm

Option

Finish



Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others



Lighting Efficiency

Normal:80-85lm/w
Custom:90-110lm/w



DL-DL02 Series Downlight

SMD LED downlight adopts Samsung and Epistar high bright SMD light source. With patent die-casting aluminum heat sink, giving it good looking and better heat dissipation.

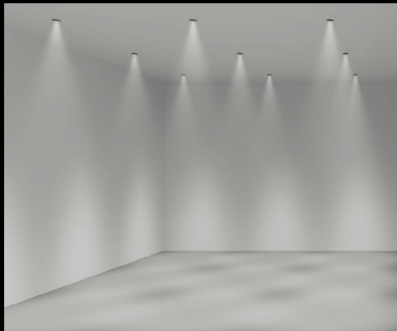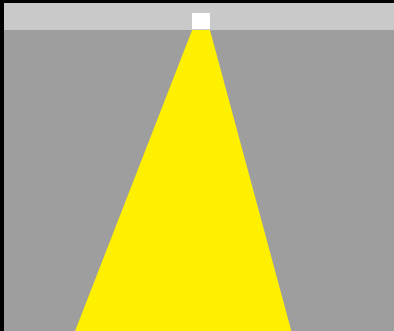

Model	KS-DL02-4
LED Chip	SAMSUNG Epistar
LED Power	12W/15W
CCT	3000K-6000K
CRI	Ra > 80 / 90
Beam Angle	90°
Size	145mm*145mm*45mm
Cutout	125mm*125mm



Model	KS-DL02-6
LED Chip	SAMSUNG Epistar
LED Power	15W/25W/30W
CCT	3000K-6000K
CRI	Ra > 80 / 90
Beam Angle	90°
Size	190mm*190mm*58mm
Cutout	165mm*165mm





Model	KS-DL02-8
LED Chip	SAMSUNG Epistar
LED Power	25W/30W/35W
CCT	3000K-6000K
CRI	Ra > 80 / 90
Beam Angle	90°
Size	230mm*230mm*62mm
Cutout	200mm*200mm

Option		
Finish	Dim Type	Lighting Efficiency
Body	-TRIAC -0-10V -1-10V -DALI -Others	Normal:80-85lm/w Custom:90-110lm/w



DL-DL15 Series Downlight
Downlight with 3 High Features: High efficiency, reach 100lm/w; High birghtness, super enough flux; High value, widely used and little complaint downlight, ensuring your high taste demands.

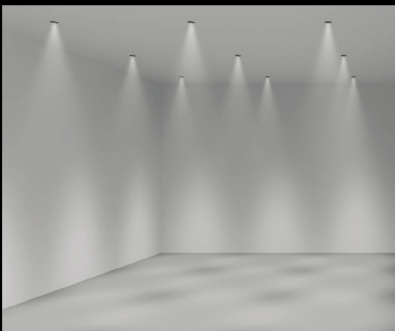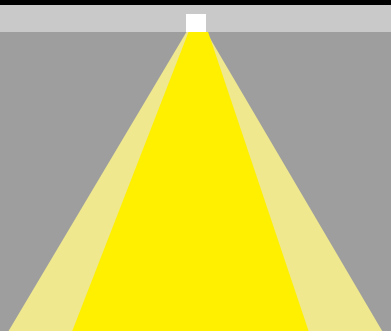

Model	KAS-DL15R-B-3	KAS-DL15R-B-4	KAS-DL15R-B-6	KAS-DL15R-B-8
LED Chip	CITIZEN	CITIZEN	CITIZEN	CITIZEN
LED Power	5W/8W	10W/15W	20W/25W	20W/30W
CRI	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90
Beam Angle	60°	60°	60°	60°
Size	104mm*57mm	140mm*61mm	180mm*46mm	220mm*63mm
Cutout	⌀ 90mm	⌀ 125mm	⌀ 160mm	⌀ 190mm



Model	KAS-DL15-A-2	KAS-DL15-A-3	KAS-DL15-A-4	KAS-DL15-A-6	KAS-DL15-A-8
LED Chip	Epistar	Epistar	Epistar	Epistar	Epistar
LED Power	5W/7W	7W/9W/11W	11W/15W	11W/15W/20W/23W	20W/23W/30W
CRI	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90
Beam Angle	90°	90°	90°	90°	90°
Size	85mm*32mm	104mm*25.8mm	140mm*27.5mm	180mm*28.8mm	220mm*46mm
Cutout	⌀ 70mm	⌀ 90mm	⌀ 125mm	⌀ 160mm	⌀ 190mm



Model	KAS-DL15-B-2	KAS-DL15-B-3	KAS-DL15-B-4	KAS-DL15-B-6	KAS-DL15-B-8
LED Chip	Epistar	Epistar	Epistar	Epistar	Epistar
LED Power	5W/7W	7W/9W/11W	11W/15W	15W/20W/23W	20W/23W/30W
CRI	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90	Ra > 80/90
Beam Angle	90°	90°	90°	90°	90°
Size	90mm*38mm	104mm*36.3mm	140mm*38.3mm	180mm*41.3mm	220mm*63mm
Cutout	⌀ 70mm	⌀ 90mm	⌀ 125mm	⌀ 160mm	⌀ 190mm



Option

Finish	Dim Type	Lighting Efficiency
Body   	-TRIAC -0-10V -1-10V -DALI -Others	Normal:80-85lm/w Custom:90-110lm/w



DL-DL16 Series Downlight

Downlight with 3 High Features: High efficiency, reach 100lm/w; High brightness, super enough flux; High value, widely used and little complaint downlight, ensuring your high taste demands.

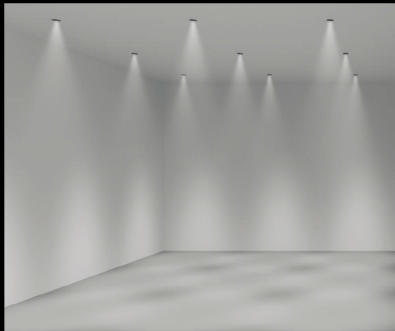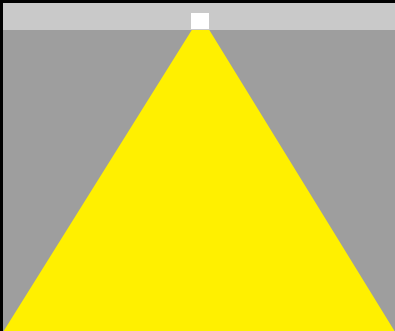

Model	KAS-DL16-A-3	KAS-DL16-A-4	KAS-DL16-A-6
LED Chip	Epistar	Epistar	Epistar
LED Power	7W/9W/11W	11W/15W	15W/20W/23W
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	90°	90°	90°
Size	104mm*104mm*25.7mm	140mm*140mm*27.8mm	180mm*180mm*28.8mm
Cutout	90mm*90mm	125mm*125mm	160mm*160mm



Model	KAS-DL16-B-3	KAS-DL16-B-4	KAS-DL16-B-6
LED Chip	Epistar	Epistar	Epistar
LED Power	7W/9W/11W	11W/15W	15W/20W/23W
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	90°	90°	90°
Size	104mm*104mm*36.3mm	140mm*140mm*38.3mm	180mm*180mm*41.3mm
Cutout	90mm*90mm	125mm*125mm	160mm*160mm

Option

Finish



Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others

Lighting Efficiency





Normal:80-85lm/w
Custom:90-110lm/w




IP67

Underground Lamp

The module adopts precise aluminum, beautiful exterior design, anti corrosion, sturdy and durable by polishing techniques of superior stainless steel.IP67 waterproof and dustproof.Varied beam angle: 10°/20°/ 30°/40°, polarized.Smaller fitting size, Wattage 1W/3W,which adopts pressure tempered glass. Application: Square/seaside road/private villa/ garden/tourist attractions

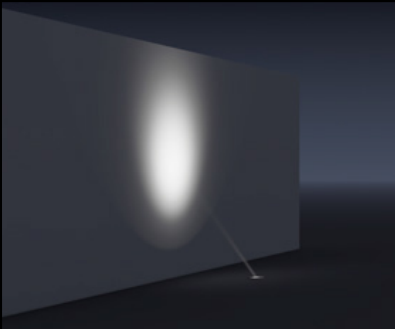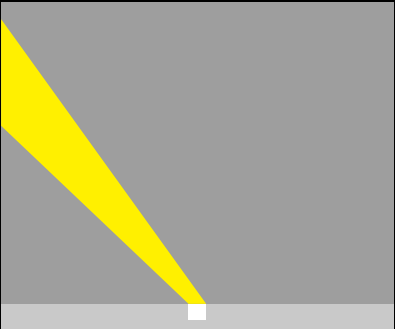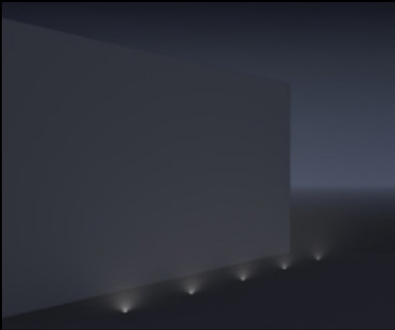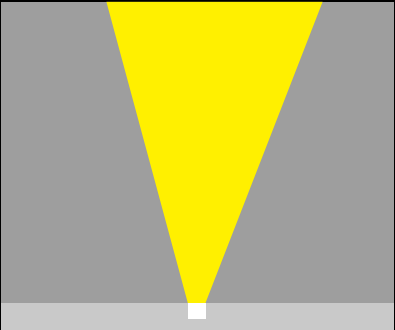

Model	KAS-BU02
LED Chip	CREE
LED Power	1W/3W
CCT	2700-5000K
CRI	Ra>80/90
Size	43mm*60mm
Cutout	35mm

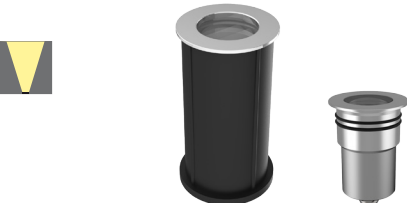



Model	KAS-BU03
LED Chip	CREE
LED Power	1W/3W
CCT	2700-5000K
CRI	Ra>80/90
Beam Angle	15°/20°
Size	43mm*60mm
Cutout	35mm

Option		
Finish	Dim Type	Lighting Efficiency
Body	-TRIAC -0-10V -1-10V -DALI -Others	Normal:50-65lm/w




TL-13 Deep V Series Spotlight

The anti-glare features, ensures you visual comfort. Superior lighting performance meets strict requirements of special areas.

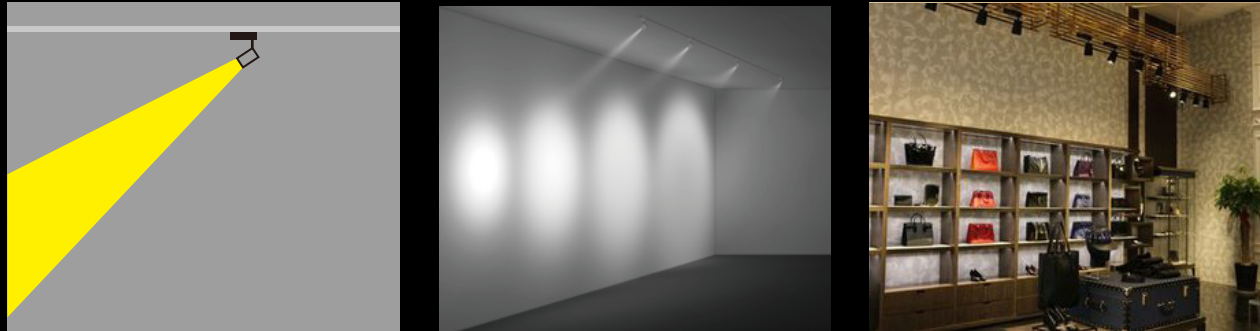

Model	KAS-TL13R-A-10
LED Chip	CREE CITIZEN
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra>80 / 90
Beam Angle	15°/20° 30°/36°/45°
Size	142mm*100mm*205mm
Phase	1/2/3 Phase



Model	KAS-TL13R-A-11
LED Chip	CREE CITIZEN
LED Power	30W/35W/40W
CCT	2700K-5000K
CRI	Ra>80 / 90
Beam Angle	15°/24° 30°/36°/45°
Size	165mm*115mm*215mm
Phase	1/2/3 Phase

Option

Finish

Body ☐ ☐

Phase



1 Phase



2 Phase



3 Phase

Connector




Dim Type

-TRIAC
-DALI
-Others

Lighting Efficiency

Normal:80-85lm/w
Custom:90-100lm/w





Model	KAS-TL13R-D-10
LED Chip	CREE CITIZEN
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra>80 / 90
Beam Angle	15°/20° 30°/36°/45°
Size	142mm*100mm*192mm




TL-11 Series Spotlight


355°Rotatable & 90°adjustable,different beam angle, power /CCT & high CRI,be widely used in different site. high effective power with high purity aluminum,make the heat-sink cooling effect more outstanding.

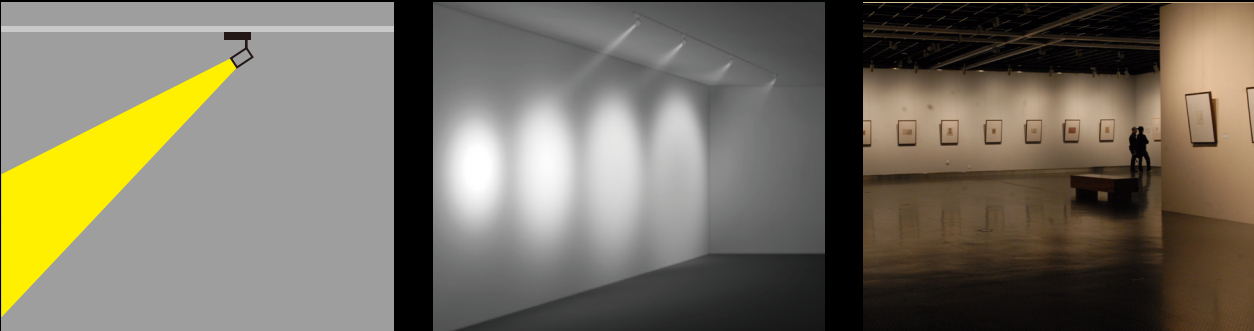

Model	KAS-TL11R-A-96
LED Chip	CREE CITIZEN
LED Power	30W/35W/40W/50W
CCT	2700K-5000K
CRI	Ra > 80 / 90
Beam Angle	15°/20°/30°/36°/45°
Size	160mm*96mm*205mm
Phase	1/2/3 Phase



Model	KAS-TL11R-A-66
LED Chip	CREE
LED Power	10W/15W
CCT	2700K-5000K
CRI	Ra > 80 / 90
Beam Angle	10°/15°/26°/35°/47°
Size	138mm*66mm*160mm
Phase	1/2/3 Phase




Model	KAS-TL11R-A-80
LED Chip	CITIZEN
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra > 80 / 90
Beam Angle	15°/20°/30°/36°/45°
Size	162mm*80mm*194mm
Phase	1/2/3 Phase

Option

Finish



Phase

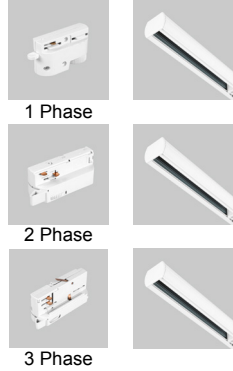

Connector



Dim Type

-TRIAC
-DALI
-Others


Lighting Efficiency

Normal:80-90lm/w
Custom:90-100lm/w



TL-10 Series Spotlight

being elegant in appearance with built-in driver design, its optical performance is outstanding. mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.

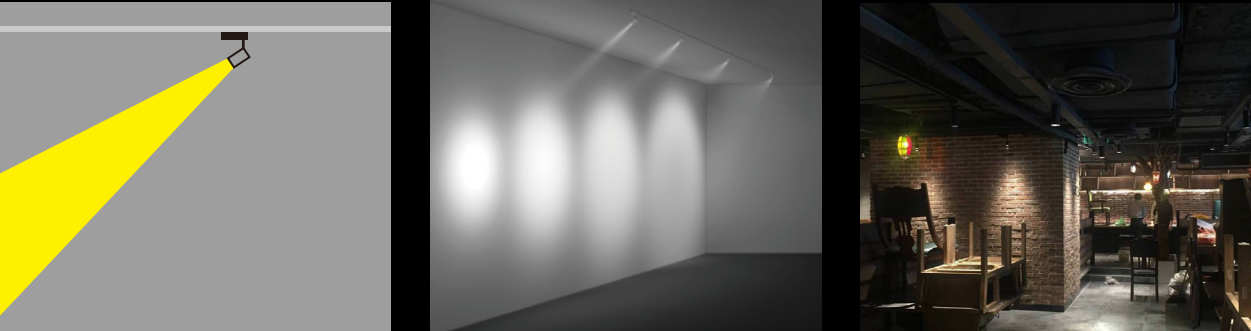



Model	KAS-TL10R-A-50	KAS-TL10R-A-66	KAS-TL10R-A-80
LED Chip	CREE CITIZEN	CREE CITIZEN	CITIZEN
LED Power	7W	10W/15W	25W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/26°/35°/47°	10°/15°/26°/35°/47° 15°/26°/35°/47°	15°/20°/30°/36°/45°
Size	135mm*50mm*134mm	180mm*66mm*143mm	182mm*80mm*158mm
Phase	1/2/3 Phase	1/2/3 Phase	1/2/3 Phase



Model	KAS-TL10R-D-50	KAS-TL10R-D-66	KAS-TL10R-D-80
LED Chip	CREE CITIZEN	CREE CITIZEN	CITIZEN
LED Power	7W	10W/15W	25W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/26°/35°/47°	10°/15°/26°/35°/47° 15°/26°/35°/47°	15°/20°/30°/36°/45°
Size	135mm*50mm*144mm	180mm*66mm*160mm	182mm*80mm*180mm

Option

Finish
Body ☐ ☐

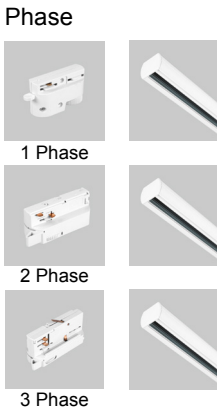

Model	KAS-TL10R-C-50	KAS-TL10R-C-66	KAS-TL10R-C-80
LED Chip	CREE CITIZEN	CREE CITIZEN	CITIZEN
LED Power	7W	10W/15W	25W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	10°/15°/26°/35°/47°	10°/15°/26°/35°/47° 15°/26°/35°/47°	15°/20°/30°/36°/45°
Size	135mm*50mm*106mm	180mm*66mm*123mm	182mm*80mm*135mm
Cutout	90mm-95mm	90mm-95mm	90mm-95mm






Dim Type
-TRIAC
-DALI
-Others

Lighting Efficiency
Normal:80-90lm/w
Custom:90-100lm/w




TL-10-B Series Spotlight


Side wall rotation design,easy to install and change.High purity aluminum radiator makes long life and high CRI Keep objects brightly colored and gorgeous.Best Choice for supermarket,Showroom,Museum,Store and etc.

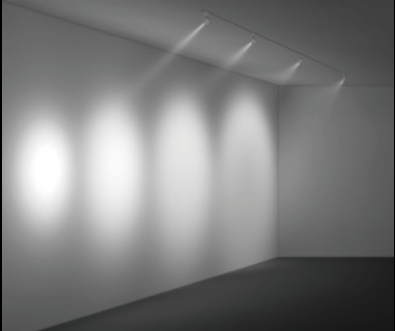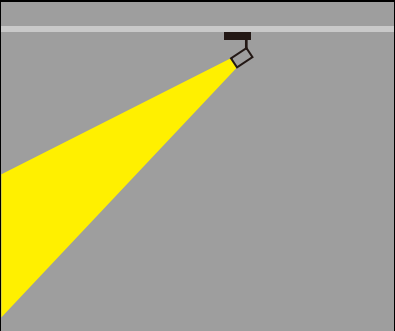

Model	KAS-TL10R-B-66
LED Chip	CREE CITIZEN
LED Power	10W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	10°/15°/26°/35°/47°
Size	140mm*66mm*151mm
Phase	1/2/3 Phase



Model	KAS-TL10R-B-66
LED Chip	CREE CITIZEN
LED Power	15W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/26°/35°/47°
Size	140mm*66mm*151mm
Phase	1/2/3 Phase




Model	KAS-TL10R-B-80
LED Chip	CITIZEN
LED Power	25W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/20°/30°/36°/45°
Size	160mm*80mm*161mm
Phase	1/2/3 Phase

Option

Finish

Body ☐ ☒

Phase

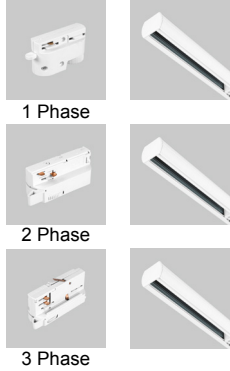

Connector





Lighting Efficiency

Normal:80-90lm/w
Custom:90-100lm/w




TL-15 Series Spotlight


Recessed installation,it can keep the ceiling perfect unification.
Vertical 90deg ,and Horizontal 350deg rotation,with high CRI,
Various lighting optics design to meet different lighting requirements.

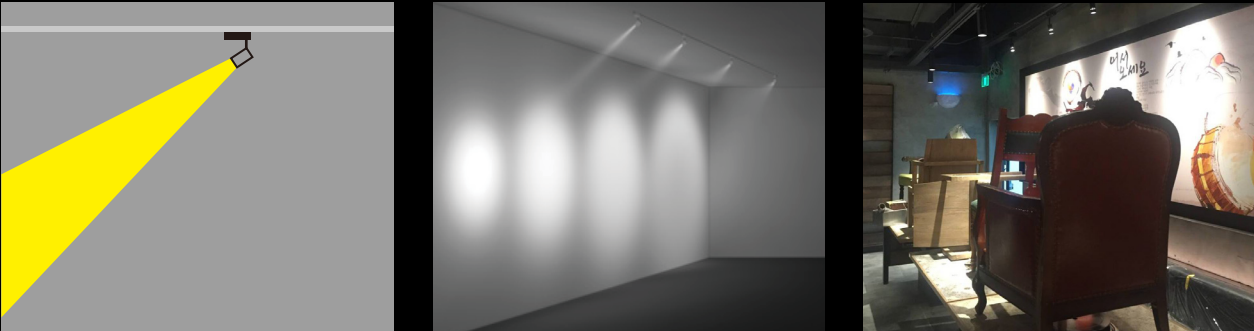

Model	KAS-TL15-A-50	KAS-TL15-A-66
LED Chip	CREE CITIZEN	CREE CITIZEN
LED Power	7W	10W/15W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/26°/35°/47°	10°/15°/26°/35°/47°
Size	145mm*50mm*83mm	180mm*66mm*99mm
Phase	1/2/3 Phase	1/2/3 Phase



Model	KAS-TL15-D-50	KAS-TL15-D-66
LED Chip	CREE CITIZEN	CREE CITIZEN
LED Power	7W	10W/15W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/26°/35°/47°	10°/15°/26°/35°/47°
Size	145mm*50mm*93mm	180mm*66mm*129mm



Model	KAS-TL15-C-50	KAS-TL15-C-66
LED Chip	CREE CITIZEN	CREE CITIZEN
LED Power	7W	10W/15W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/26°/35°/47°	10°/15°/26°/35°/47°
Size	145mm*50mm*55mm	180mm*66mm*71mm
Cutout	90mm-95mm	90mm-95mm

Option


Finish

Body ☐ ☐


Phase



1 Phase



2 Phase



3 Phase

Connector





Lighting Efficiency

Normal:80-90lm/w
Custom:90-100lm/w




TL-16 Series Spotlight

350°Rotatable & 90°adjustable,different beam angle,power CCT & high CRI,be widely used in different site.high effective power with high purity aluminum,make the heat-sink cooling effect more outstanding.

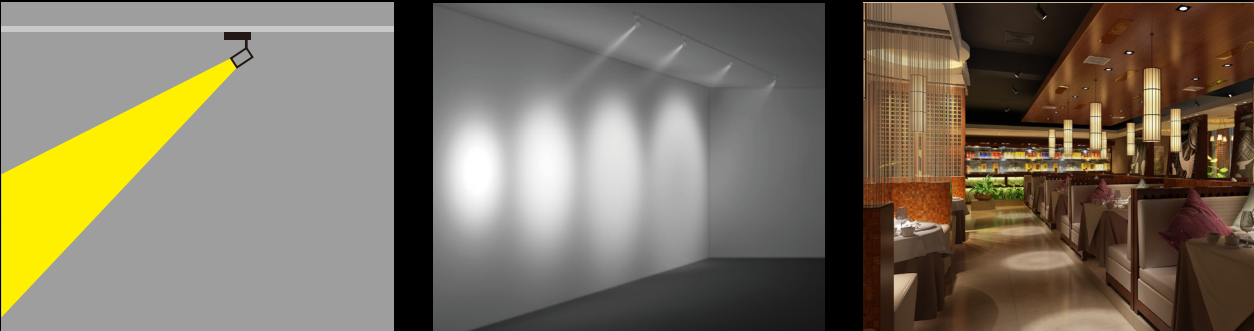

Model	KAS-TL16-A-93
LED Chip	CREE SANAN
LED Power	30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/36°
Size	168mm*93mm*199mm
Phase	1/2/3 Phase




Model	KAS-TL16-B-93
LED Chip	CREE SANAN
LED Power	30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/36°
Size	168mm*93mm*167mm
Phase	1/2/3 Phase

Option

Finish

Body ☐ ☐

Phase

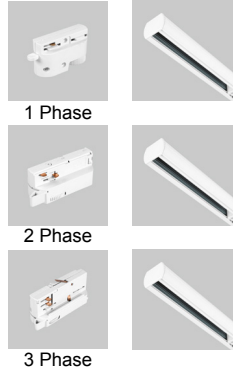

Connector



Dim Type

-TRIAC
-DALI
-Others



Lighting Efficiency

Normal:80-85lm/w
Custom:90-100lm/w




TL-18 Series Spotlight


Coming for mall, Show room,Bar, museum, gallery, Classical but with elegant design for friendly design of 90°adjustable & 355°rotation Multiple beam angle & high CRI for different lighting purpose.High efficiency of lighting transmission for higher lumens output

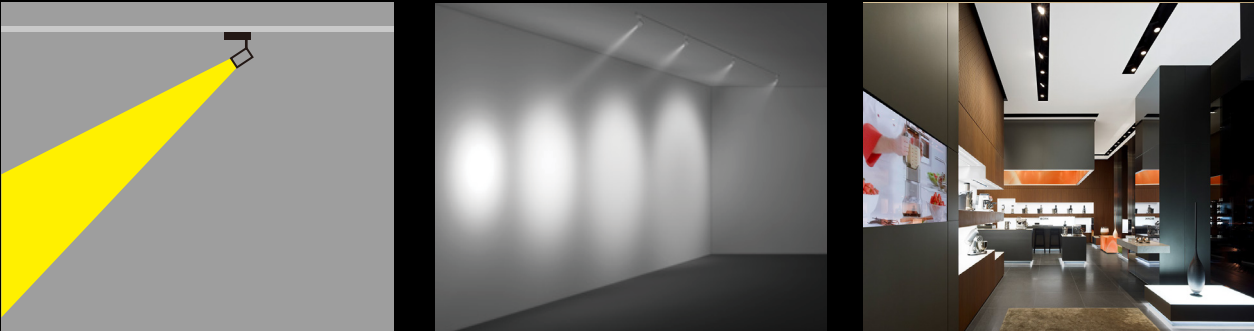


Model	KAS-TL18-A-95
LED Chip	CITIZEN
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/36°
Size	78mm*95mm*191mm
Phase	1/2/3 Phase



Model	KAS-TL18-B-95
LED Chip	COB
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	20°/24°/36°
Size	82mm*95mm*160mm
Phase	1/2/3 Phase



Model	KAS-TL18-C-95
LED Chip	COB
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/36°
Size	78mm*95mm*120mm




Model	KAS-TL18-D-95
LED Chip	COB
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	20°/24°/36°
Size	82mm*95mm*165mm
Phase	1/2/3 Phase

Option

Finish



Phase

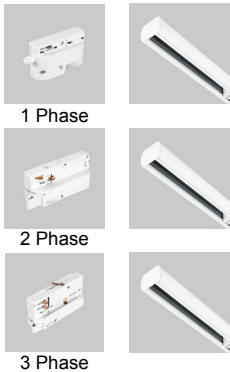

Connector





Lighting Efficiency

Normal:80-90lm/w
Custom:90-100lm/w



TL-17 Series Spotlight

High power for places demanding high brightness and large illumination areas. High-purity aluminum heat sink, good for heat dissipation, low luminous decay, and long lifespan. Various beam angles, power and color temperature for different lighting requirements. High CRI, to make the color of objects fresh and gorgeous. Vertical adjusting 90°, horizontal rotating 355° High light efficiency and high transmittance, greatly improving whole light effect. Application including shopping mall, exhibition hall, bar, store, museum and gallery for lighting and decoration.

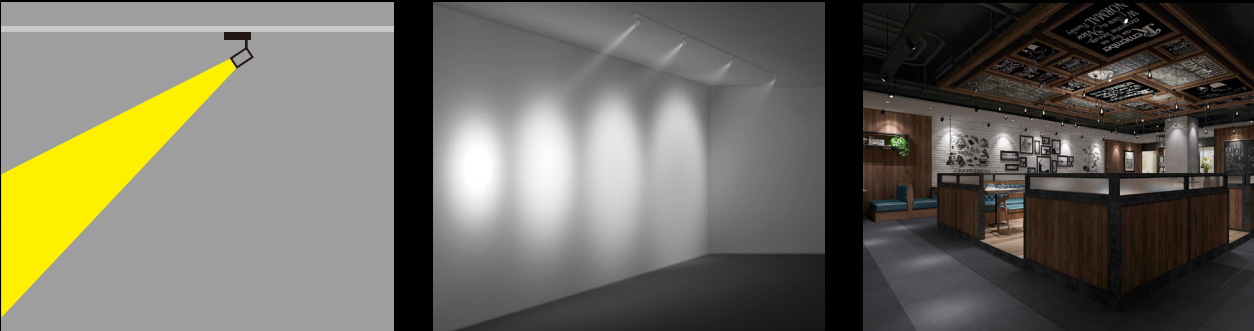


Model	KAS-TL17-A-12
LED Chip	CITIZEN
LED Power	40W/50W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/35°
Size	143mm*120mm*230mm
Phase	1/2/3 Phase

Option

Finish
Body ☐ ☐





Lighting Efficiency
Normal:90-100lm/w

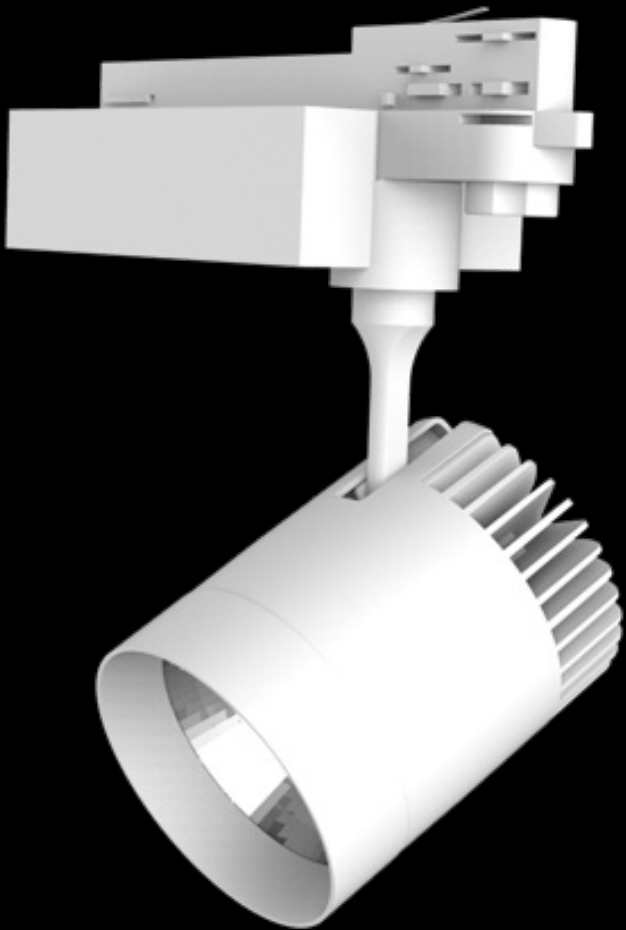


Anti-glare LED Track Light

LED fashionable track light combines fantastic features and performance. With patent die-casting aluminum heatsink, giving it beautiful looks and excellent heat dissipation. Reaching up to the highest standard of LED technology.

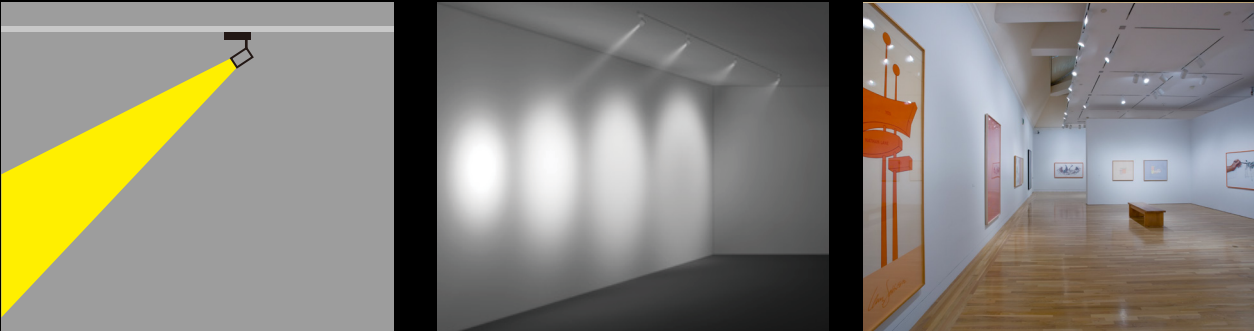

Model	KAS-TL08R-A-5
LED Chip	CREE CITIZEN
LED Power	25W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/20°/30°/36°/45°
Size	120mm*75mm*170mm
Phase	1/2/3 Phase




Model	KAS-TL08R-A-6
LED Chip	CREE CITIZEN
LED Power	30W/40W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/30°/36°/45°
Size	134mm*100mm*208mm
Phase	1/2/3 Phase

Option

Finish



Phase

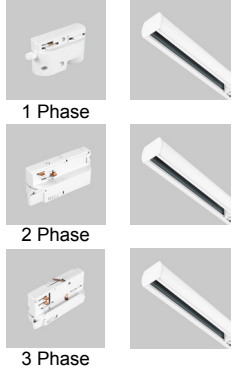

Connector



Dim Type

-TRIAC
-DALI
-Others



Lighting Efficiency

Normal:80-85lm/w
Custom:90-100lm/w




TL-09 Series Spotlight

With color filters, they are good for decorative lighting effects, and ensure you soft and comfortable lighting.

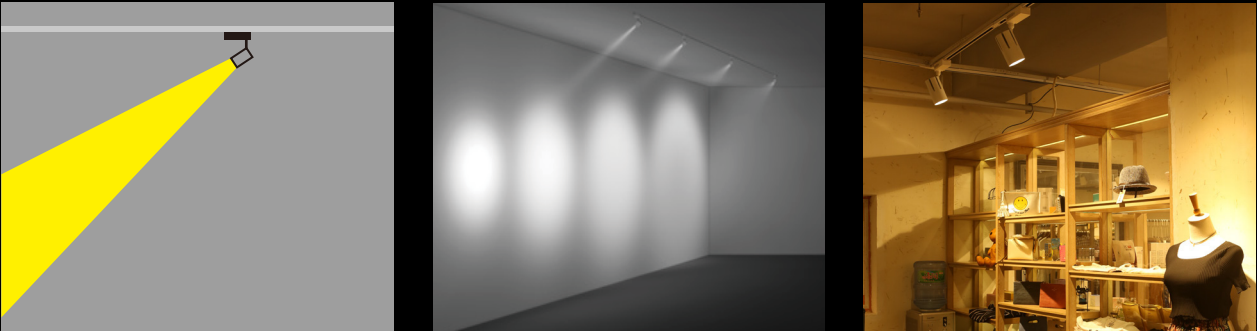

Model	KAS-TL09R-A-80
LED Chip	CREE CITIZEN
LED Power	20W/30W
CCT	2700K-5000K
CRI	Ra > 80 / 90
Beam Angle	15°/20°/30°/36°/45°
Size	125mm*80mm*176mm
Phase	1/2/3 Phase




Model	KAS-TL09R-A-96
LED Chip	CREE CITIZEN
LED Power	30W/40W/50W
CCT	2700K-5000K
CRI	Ra > 80 / 90
Beam Angle	15°/20°/30°/36°/45°
Size	140mm*96mm*204mm
Phase	1/2/3 Phase

Option

Finish



Phase

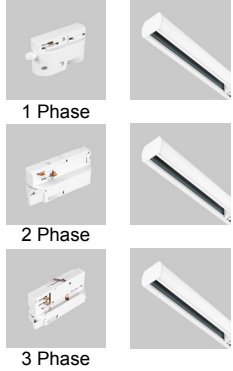

Connector



Dim Type

-TRIAC
-DALI
-Others




Lighting Efficiency

Normal:80-85lm/w
Custom:90-100lm/w




Anti-glare LED Track Light


Simple classic design, elegant appearance, useful functions, and adjusted emitting angle meet your requirements to reach the best lighting effect.

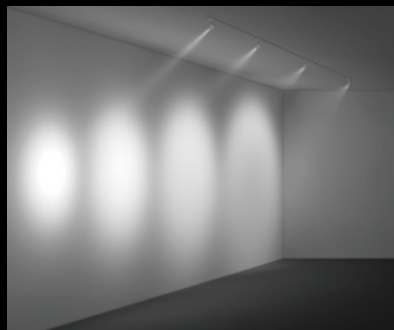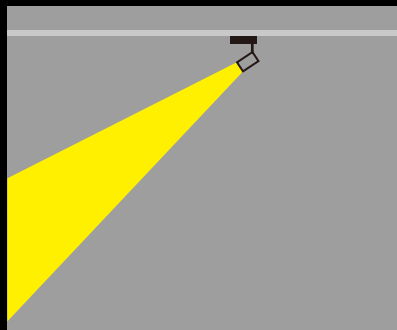

Model	KAS-TL03R-B-3	KAS-TL03R-B-4
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	100mm*62mm*138mm	125mm*90mm*150mm



Model	KAS-TL03R-C-3	KAS-TL03R-C-4
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	104mm*47mm*129mm	130mm*75mm*140mm



Model	KAS-TL03R-D-3	KAS-TL03R-D-4
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	110mm*47mm*129mm	120mm*75mm*140mm




Option

Finish



Phase

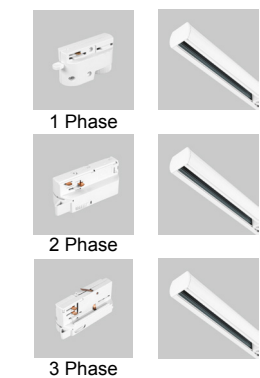

Connector





Lighting Efficiency

Normal:50-75lm/w




TL-03-S Series Spotlight


Simple classic design, elegant appearance, useful functions, and adjusted emitting angle meet your requirements to reach the best lighting effect.

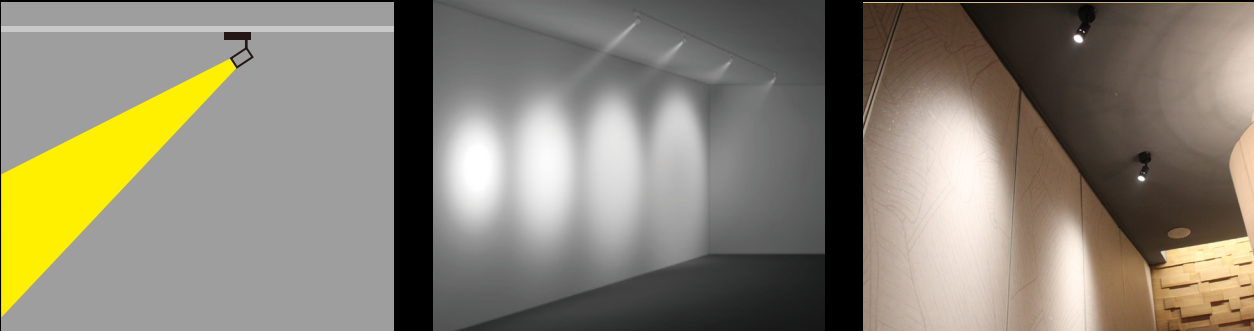

Model	KAS-TL03R-B-3-S	KAS-TL03R-B-4-S
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	100mm*62mm*131mm	125mm*90mm*143mm



Model	KAS-TL03R-C-3-S	KAS-TL03R-C-4-S
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	104mm*47mm*123mm	130mm*75mm*136mm



Model	KAS-TL03R-D-3-S	KAS-TL03R-D-4-S
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	110mm*47mm*123mm	120mm*75mm*136mm


Option

Finish






Lighting Efficiency

Normal:50-75lm/w

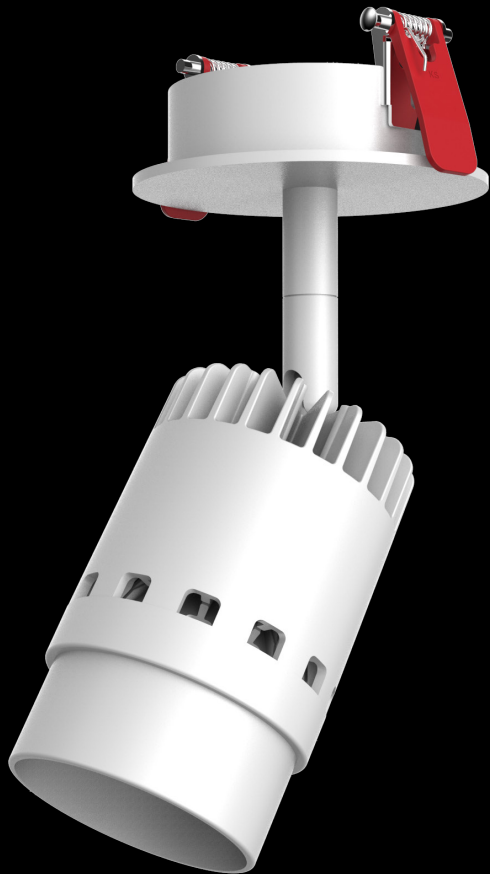


TL-03-H Series Spotlight

Simple classic design, elegant appearance, useful functions, and adjusted emitting angle meet your requirements to reach the best lighting effect.

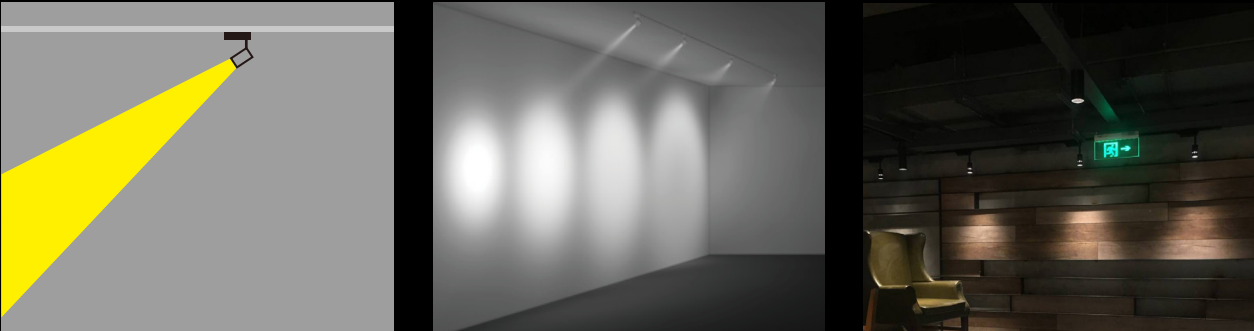

Model	KAS-TL03R-B-3-H	KAS-TL03R-B-4-H
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	100mm*62mm*91mm	125mm*90mm*103mm
Cutout	70mm-75mm	90mm-95mm

Model	KAS-TL03R-C-3-H	KAS-TL03R-C-4-H
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	104mm*47mm*83mm	130mm*75mm*95mm
Cutout	70mm-75mm	90mm-95mm



Model	KAS-TL03R-D-3-H	KAS-TL03R-D-4-H
LED Chip	CREE	CREE
LED Power	8W/10W	15W/20W
CCT	2700K-5000K	2700K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24° 30°/36°	15°/24°/30° 36°/60°
Size	110mm*47mm*83mm	120mm*75mm*95mm
Cutout	70mm-75mm	90mm-95mm


Option

Finish





Lighting Efficiency

Normal:50-75lm/w



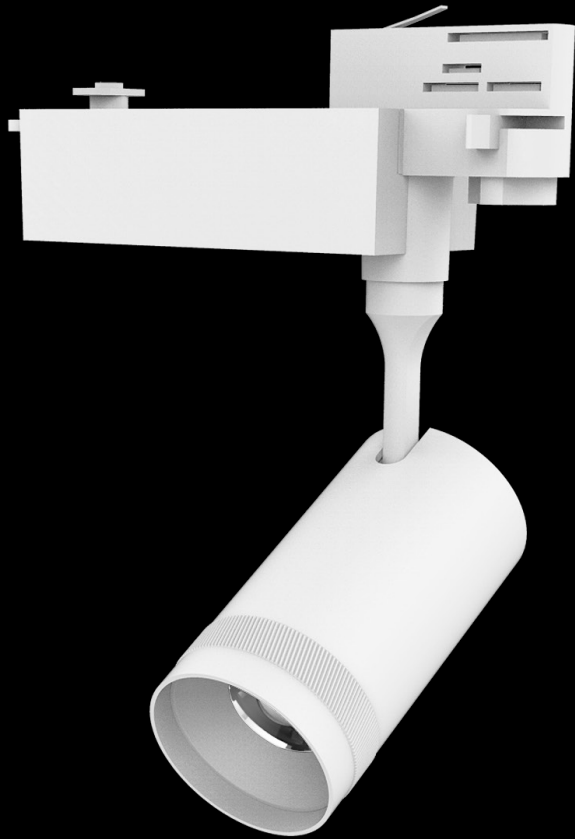


TL-19 Series Spotlight

Focusing adjustable from 15° to 45°.High-purity aluminum heat sink, good for heat dissipation, low luminous decay, and long lifespan.Various beam angles, power and color temperature for different lighting requirements.High CRI, to make the color of objects fresh and gorgeous.Vertical adjusting 90°, horizontal rotating 355° High light efficiency and high transmittance, greatly improving whole light effect.Application including shopping mall, exhibition hall, bar, store, museum and gallery for lighting and decoration.

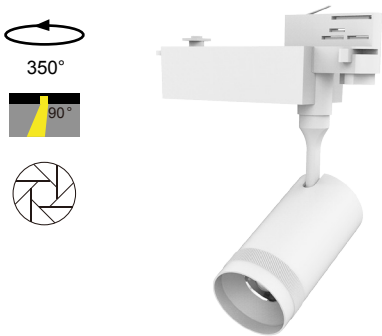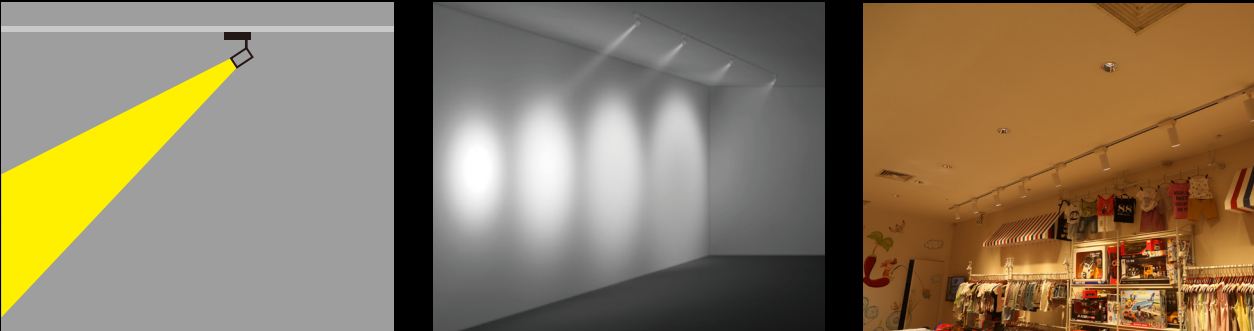






Model	KAS-TL19-A-66
LED Chip	CITIZEN
LED Power	10W/15W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15° - 45°
Size	130mm*66mm*175mm
Phase	1/2/3 Phase

Option	
Finish	Connector
Body  	  
Phase	  
1 Phase	  
2 Phase	  
3 Phase	  
Lighting Efficiency	
Normal:80-90lm/w Custom:90-100lm/w	



LED Grille Light

Multiple versions embrace the concept of innovation with a good performance, uniqueness, durability and versatility; highlighting the characteristics of Kam's grille light.

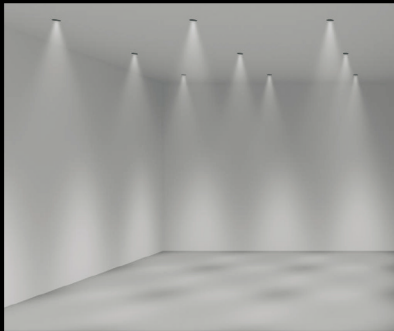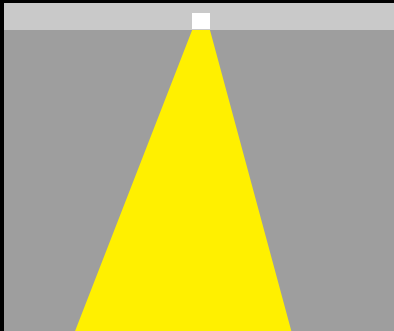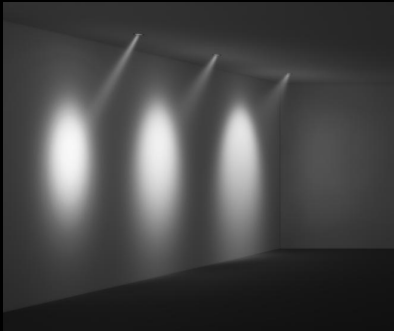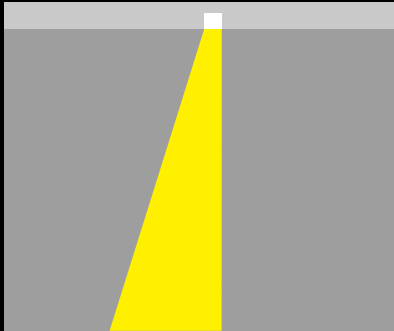

Model	KAS-BL03R-B1-3	KAS-BL03R-B1-4	KAS-BL03R-B1-4
LED Chip	CREE	CREE	CREE
LED Power	10W	15W/20W	30W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	93mm*93mm*103mm	123mm*123mm*120mm	123mm*123mm*140mm
Cutout	82mm*82mm	112mm*112mm	112mm*112mm

Model	KAS-BL03R-B2-3	KAS-BL03R-B2-4	KAS-BL03R-B2-4
LED Chip	CREE	CREE	CREE
LED Power	20W	30W/40W	60W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	173mm*93mm*103mm	232mm*123mm*120mm	232mm*123mm*140mm
Cutout	162mm*82mm	222mm*112mm	222mm*112mm



Model	KAS-BL03R-B3-3	KAS-BL03R-B3-4	KAS-BL03R-B3-4
LED Chip	CREE	CREE	CREE
LED Power	30W	45W/60W	90W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	252mm*93mm*103mm	342mm*123mm*120mm	342mm*123mm*140mm
Cutout	242mm*82mm	332mm*112mm	332mm*112mm

Option

Finish



Dim Type

- TRIAC
- 1-10V
- DALI
- Others







Lighting Efficiency

Normal:75-85lm/w
Custom:90-100lm/w




LED Grille Light

Multiple versions embrace the concept of innovation with a good performance, uniqueness, durability and versatility; highlighting the characteristics of Kam's grille light.

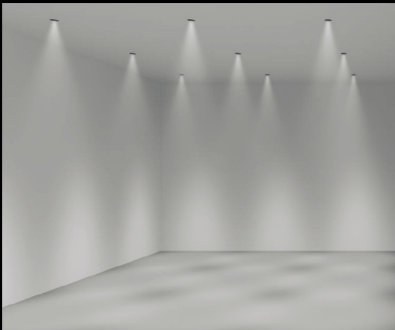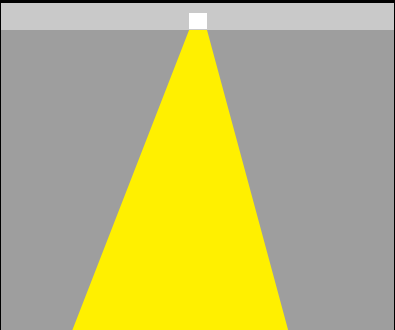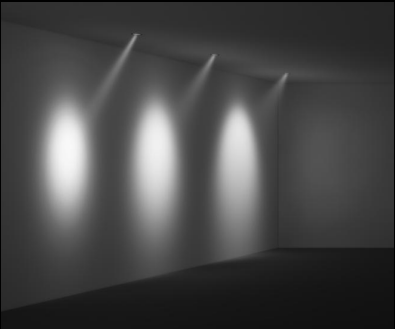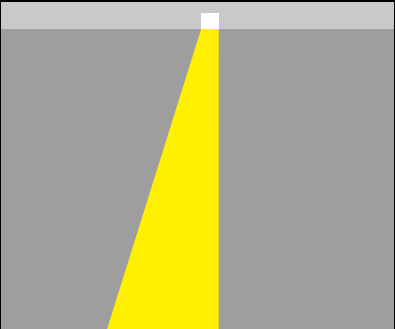

Model	KAS-BL10R-1-3	KAS-BL10R-1-4	KAS-BL10R-1-4
LED Chip	CREE	CREE	CREE
LED Power	10W	15W/20W	25W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	93mm*93mm*135mm	123mm*123mm*178mm	123mm*123mm*178mm
Cutout	82mm*82mm	112mm*112mm	112mm*112mm

Model	KAS-BL10R-2-3	KAS-BL10R-2-4	KAS-BL10R-2-4
LED Chip	CREE	CREE	CREE
LED Power	20W	30W/40W	50W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	173mm*93mm*135mm	232mm*123mm*178mm	232mm*123mm*178mm
Cutout	165mm*85mm	222mm*112mm	222mm*112mm



Model	KAS-BL10R-3-3	KAS-BL10R-3-4	KAS-BL10R-3-4
LED Chip	CREE	CREE	CREE
LED Power	30W	45W/60W	75W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	252mm*93mm*135mm	342mm*123mm*178mm	342mm*123mm*178mm
Cutout	240mm*82mm	332mm*112mm	332mm*112mm

Option

Finish

Body



Dim Type

-TRIAC
-1-10V
-DALI
-Others





Lighting Efficiency

Custom:90-100lm/w



Trimless Grille Light

Trimless design for simplicity & elegance, have exquisite lighting environment.

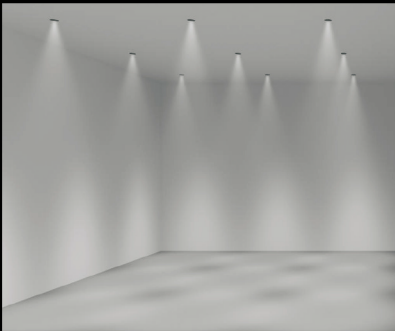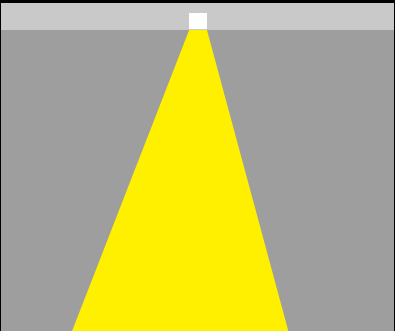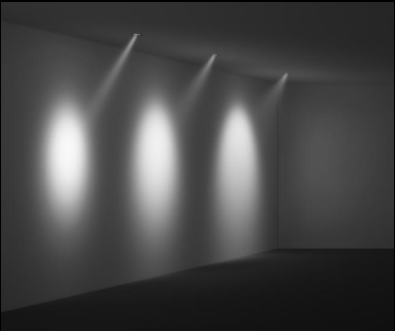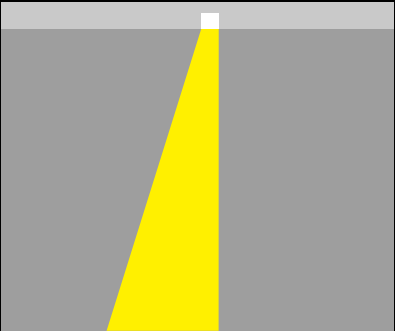

Model	KAS-BL12R-1-3	KAS-BL12R-1-4	KAS-BL12R-1-4
LED Chip	CREE	CREE	CREE
LED Power	10W	15W/20W	30W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	155mm*85mm*105mm	197mm*125mm*140mm	197mm*125mm*140mm
Cutout	86mm*86mm	126mm*126mm	126mm*126mm

Model	KAS-BL12R-2-3	KAS-BL12R-2-4	KAS-BL12R-2-4
LED Chip	CREE	CREE	CREE
LED Power	20W	30W/40W	60W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	10°/15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	237mm*85mm*135mm	317mm*125mm*175mm	317mm*125mm*175mm
Cutout	166mm*86mm	246mm*126mm	246mm*126mm



Model	KAS-BL12R-3-3	KAS-BL12R-3-4	KAS-BL12R-3-4
LED Chip	CREE	CREE	CREE
LED Power	30W	45W/60W	90W
CCT	3000K-5000K	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Size	315mm*85mm*135mm	427mm*125mm*175mm	427mm*125mm*175mm
Cutout	245mm*86mm	356mm*126mm	356mm*126mm

Model	KAS-BL11R-4	KAS-BL11R-4
LED Chip	CREE	CREE
LED Power	15W/20W	30W/40W
CCT	3000K-5000K	3000K-5000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	15°/24°/30°/36°/60°	15°/24°/30°/36°/60°
Size	120mm*120mm*175mm	230mm*120mm*175mm

Option

Finish



Dim Type

- TRIAC
- 1-10V
- DALI
- Others


Lighting Efficiency

Normal:75-85lm/w
Custom:90-100lm/w



Stretching downlights

Recessed installation,lighting source could be hidden in ceiling as well stretching for spotlight usage. 350°lighting direction.

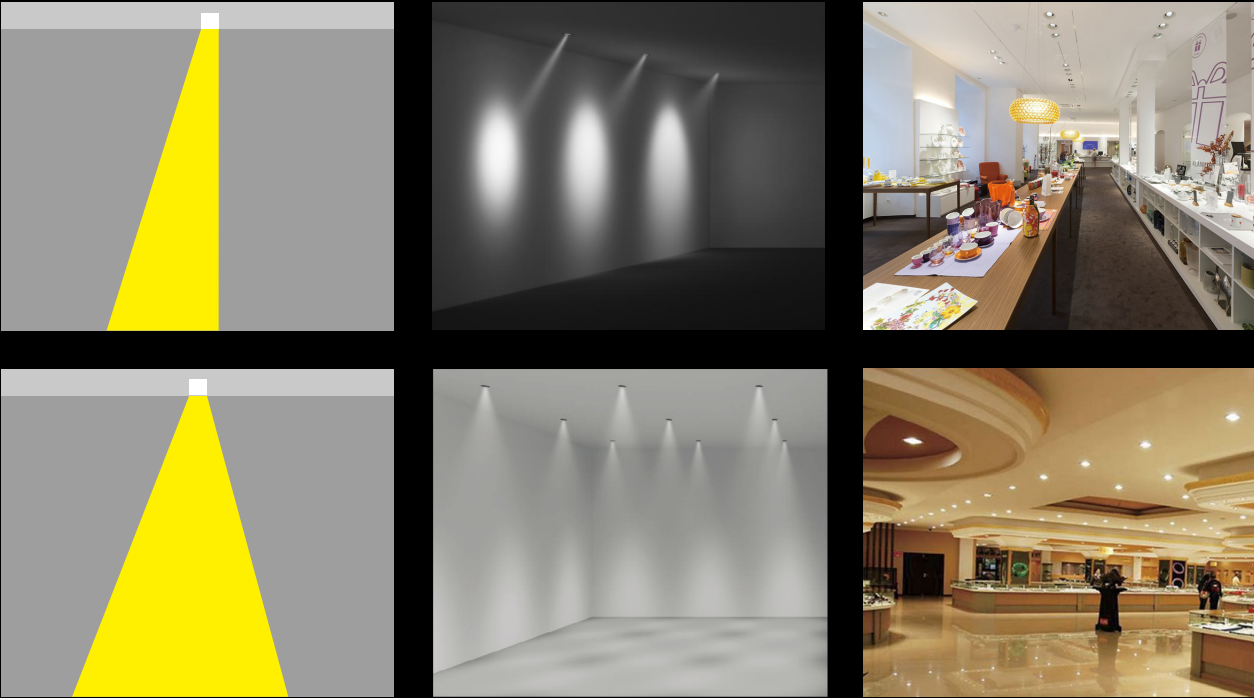

Model	KAS-DL17-L-5
LED Chip	CITIZEN
LED Power	20W/30W
CCT	2700-5000K
CRI	Ra > 80/90
Beam Angle	15°/24°/36°
Size	136mm*120mm
Cutout	126mm-128mm

Option

Finish

Body ☐ ☐

Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others



Lighting Efficiency

Normal:80-90lm/w
Custom:90-100lm/w



GD Series Adjustable Downlight

For accent lighting, the ideal choice for hotel, malls and other commercial areas lighting. Excellent lighting you want can be realized.

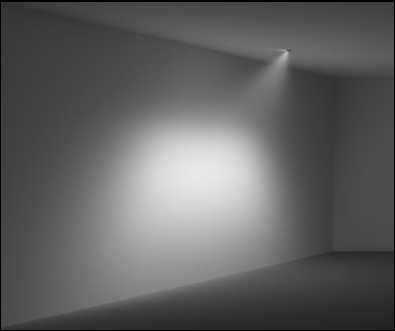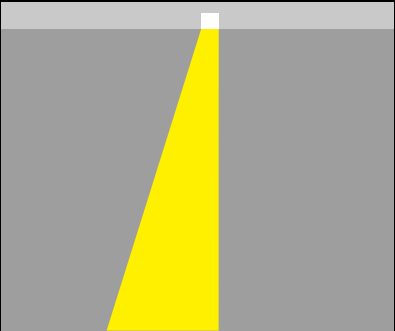

Model	KAS-DL18R-3
LED Chip	CREE
LED Power	10W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/38°/60°
Size	89mm*55mm
Cutout	75mm



Model	KAS-DL18R-6
LED Chip	CREE
LED Power	30W/40W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/36°/38°/60°
Size	165mm*145 mm
Cutout	152mm



Model	KAS-DL05R-5
LED Chip	CREE CITIZEN
LED Power	20W/25W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	20°/28°/40°
Size	140mm*115mm
Cutout	125mm



Model	KAS-DL18R-4
LED Chip	CREE
LED Power	25W/30W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	15°/24°/36°/38°/60°
Size	138mm*120 mm
Cutout	126mm



Model	KAS-DL18R-8
LED Chip	CREE
LED Power	40W/50W
CCT	2700K-5000K
CRI	Ra>80/90
Beam Angle	24°/60°
Size	190mm*165 mm
Cutout	170mm



Model	KAS-DL08R
LED Chip	SAMSUNG
LED Power	28W/38W
CCT	2700K-6000K
CRI	Ra>80/90
Beam Angle	90°
Size	241mm*150mm*88.5mm
Cutout	230mm*130 mm

Option

Finish




Dim Type

-TRIAC
-0-10V
-1-10V
-DALI
-Others


Lighting Efficiency

Normal:75-85lm/w
Custom:90-100lm/w

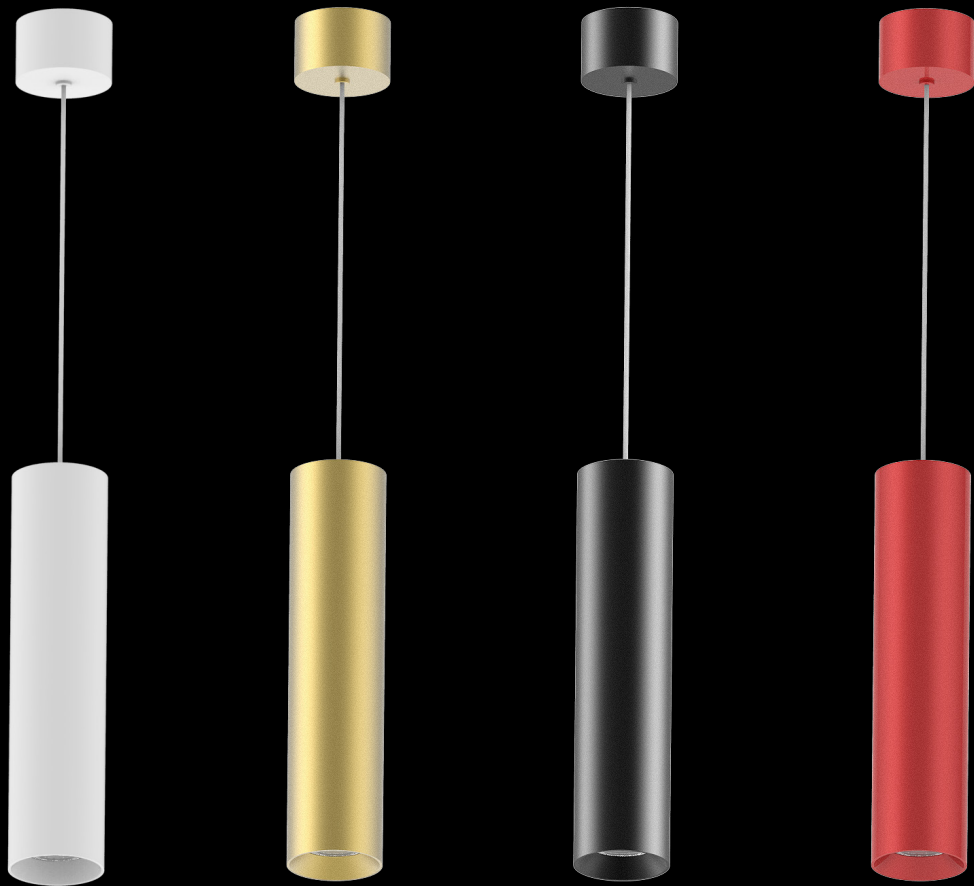

Suspended Lamp

Elongated shape pendant lamp, high-purity aluminum housing, exquisite and more metallic. High-purity aluminum heat sink, good for heat dissipation, low luminous decay, and long lifespan. Various beam angles, power and color temperature for different lighting requirements. High CRI, to make the color of objects fresh and gorgeous. High light efficiency and high transmittance, greatly improving whole light effect. Application including shopping mall, exhibition hall, bar, store, museum and gallery for lighting and decoration

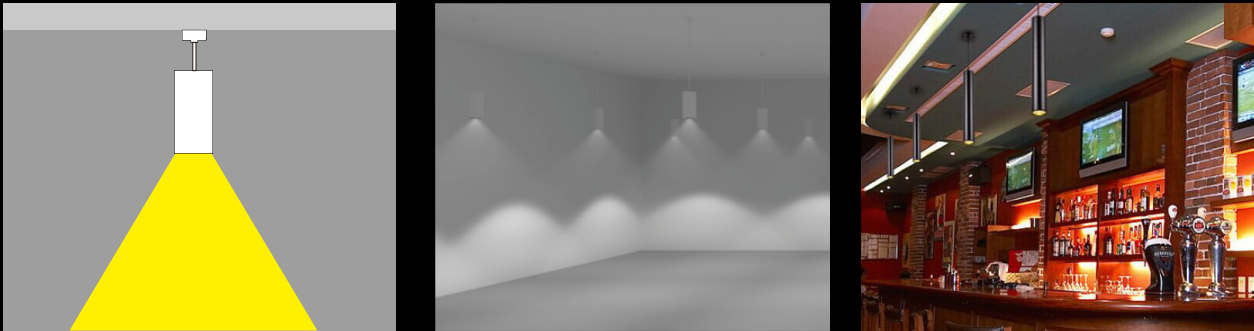


Model	KAS-PL01-A-50
LED Chip	CREE CITIZEN
LED Power	5W/7W
CCT	2700K-4000K
CRI	Ra > 80 / 90
Beam Angle	10°/15°/26°/35°/47°
Size	400mm*50mm*1940mm / 700mm*50mm*2240mm



Model	KAS-PL01-A-66
LED Chip	CREE CITIZEN
LED Power	10W/15W
CCT	2700K-4000K
CRI	Ra > 80 / 90
Beam Angle	10°/15°/26°/35°/47°
Size	400mm*66mm*1960mm / 700mm*66mm*2260mm




Option

Finish	Dim Type	Lighting Efficiency
Body	-TRIAC	Normal:80-90lm/w
	-Others	Custom:90-100lm/w

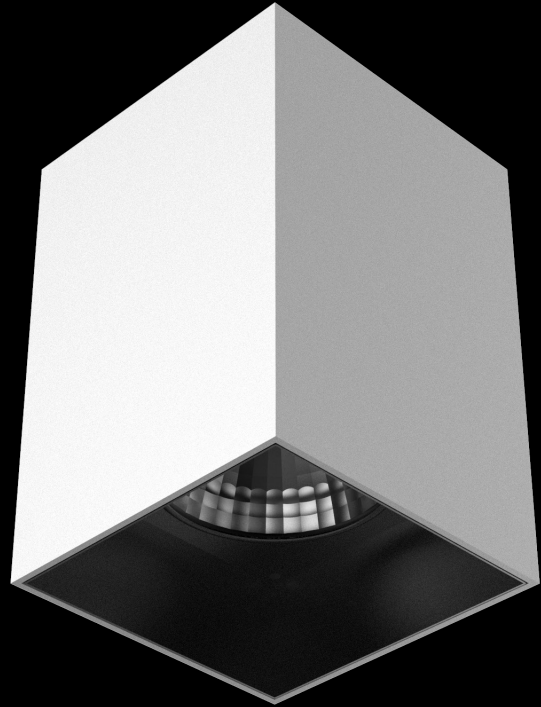

MD Series Surface & Suspended Mounted Downlight

Simple but exquisite, Kam's mounted downlight combines aesthetic features and performance. A variety of choices and customized services depending on your requirements.

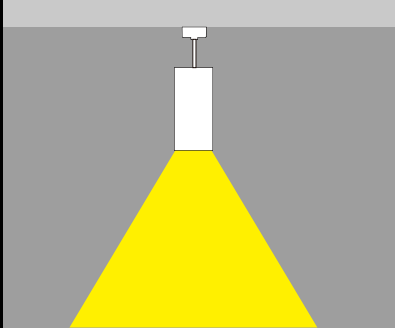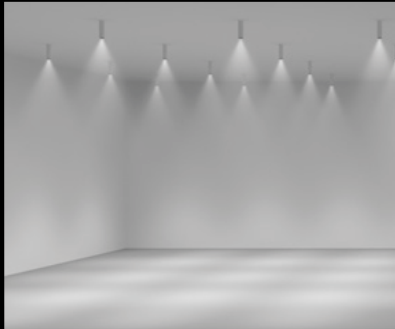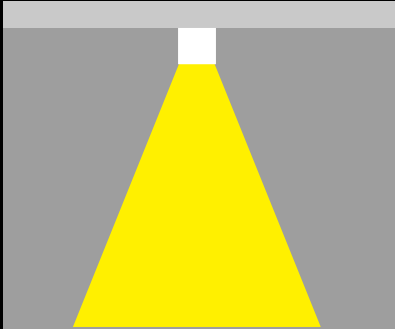

Model	KS-MD02R-A-4	KS-MD02R-A-6	KS-MD02R-A-8
LED Chip	CREE	CREE	CREE
LED Power	12W/15W	15W/20W	20W/25W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	60°	60°	60°
Size	117mm*115mm	170mm*137mm	200mm*139mm

Model	KS-MD02R-B-4	KS-MD02R-B-6	KS-MD02R-B-8
LED Chip	CREE	CREE	CREE
LED Power	12W/15W	15W/20W	20W/25W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	60°	60°	60°
Size	117mm*115mm*150mm	170mm*137mm*150mm	200mm*139mm*150mm

Model	KS-MD02D-A-4	KS-MD02D-A-6	KS-MD02D-A-8
LED Chip	SAMSUNG	SAMSUNG	SAMSUNG
LED Power	12W/15W	15W/20W	20W/30W
CCT	3000K-6000K	3000K-6000K	3000K-6000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	90°	90°	90°
Size	130mm*100mm	160mm*115mm	195mm*130mm

Model	KS-MD02D-B-4	KS-MD02D-B-6	KS-MD02D-B-8
LED Chip	SAMSUNG	SAMSUNG	SAMSUNG
LED Power	12W/15W	15W/20W	20W/30W
CCT	3000K-6000K	3000K-6000K	3000K-6000K
CRI	Ra > 80 / 90	Ra > 80 / 90	Ra > 80 / 90
Beam Angle	90°	90°	90°
Size	130mm*100mm*150mm	160mm*115mm*150mm	195mm*130mm*150mm

	
Model	KAS-MD03R-A
LED Chip	
LED Power	15W/20W/25W
CCT	2700K-5000K
CRI	Ra > 80 / 90
Beam Angle	15°/24°/30°/36°/60°
Size	100mm*100mm*145mm

		
Model	KAS-MD03R-B	
LED Chip		
LED Power	15W/20W/25W	
CCT	2700K-5000K	
CRI	Ra > 80 / 90	
Beam Angle	15°/24°/30°/36°/60°	
Size	100mm*100mm*150mm	



Option

Finish
Body

Lighting Efficiency
Normal:80-85lm/w
Custom:90-100lm/w



MD Series Surface Downlight
Kam's mounted downlight combines aesthetic features and performance. A variety of choices and customized services depending on your requirements.

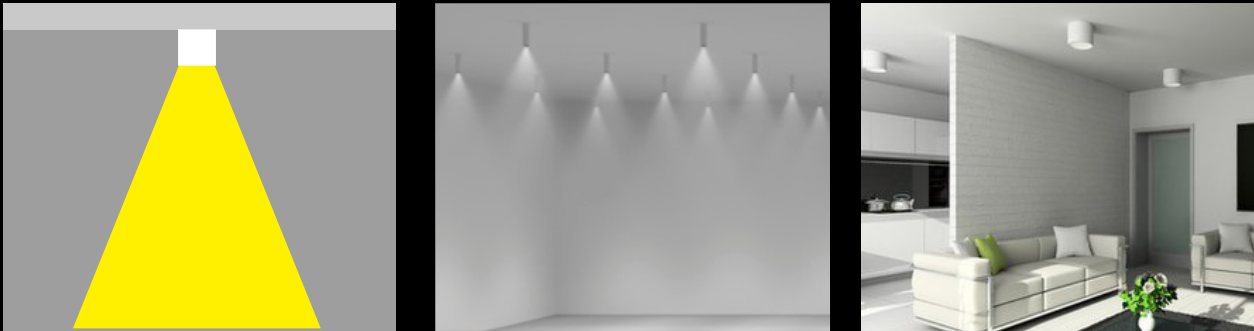

Model	KAS-MD05R-6
LED Chip	CREE
LED Power	50W/70W
CCT	2700-5000K
CRI	Ra > 80/90
Beam Angle	24°/60°
Size	160mm*252mm

Option

Finish	Dim Type	Lighting Efficiency
Body  	-TRIAC -0-10V -1-10V -DALI -Others	Normal:65-85lm/w Custom:90-100lm/w



SL-Strip Series Strip

Soft LED strip light and linear LED strip light, natural white, warm white, can meet all kinds of lighting demands.



Model	KS-SS5050	KS-SS5050(RGB)	KS-SS3528	KS-SS335
LED Chip	SMD5050	SMD5050	SMD3528	SMD335
LED Power	14.4W	14.4W	19.2W	9.6W
CCT	2700K-6000K	2700K-6000K	2700K-6000K	2700K-6000K
CRI	Ra>80/90	Ra>80	Ra>80	Ra>80
Beam Angle	120°	120°	120°	90°
Width	10mm	10mm	14mm	8mm
Input Voltage	12V/24V	12V/24V	12V/24V	12V



Model	KS-SH5050	KS-SH5050-V/U
LED Chip	SMD5050	SMD5050
LED Power	14.4W	14.4W
CCT	2700K-6000K	2700K-6000K
CRI	Ra>80/90	Ra>80/90
Beam Angle	120°	120°
Width	12mm	12mm
Input Voltage	12V/24V	12V/24V




H-Wall Series Corner Lamp

High quality buried light step light with colorful
paiting to meet your multiple demands.
CE&ROHS approval ensures each of your step is
safe.



Model	KS-BU01-015
LED Chip	Epistar
LED Power	1.5W
CCT	3000-6500K
CRI	Ra > 75
Beam Angle	90°
Size	94mm*94mm*30mm
Cutout	⌀ 86mm*86mm



Model	KS-BU04
LED Chip	Epistar
LED Power	1W/3W
CCT	2700-5000K
CRI	Ra > 90
Beam Angle	90°
Size	55mm*83mm
Cutout	⌀ 55mm

Option



Finish

Body



Lighting Efficiency


Normal: 110-120lm/w

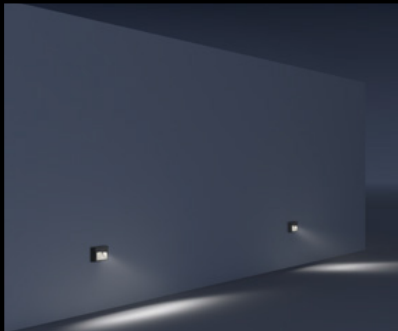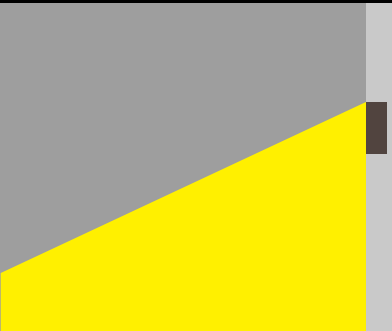



SL Series Lighting Source

High efficiency, energy saving and sustainability are the main characteristics with energy savings up to 70% compared to traditional lights. The base is compatible with traditional light fittings and can easily be upgraded to LED.

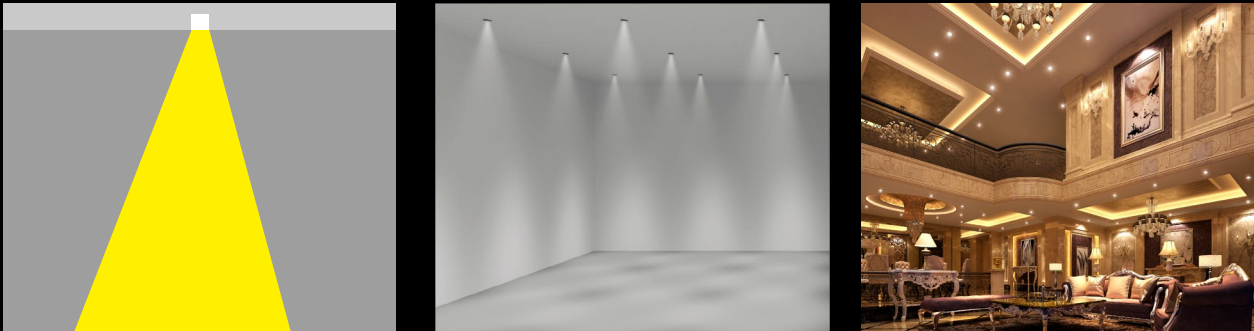

Model	KAS-AR01S
LED Chip	CREE
LED Power	15W
CCT	2700K-5000K
CRI	Ra≥80/90
Beam Angle	15°/24°/36°
Size	111mm*51.5mm



Model	KAS-MR16R
LED Chip	CREE
LED Power	8W
CCT	2700K-5000K
CRI	Ra≥80/90
Beam Angle	15°/24°/30°/36°
Size	49mm*69mm

Option

Finish



Dim Type

- TRIAC
- 0-10V
- 1-10V
- DALI
- Others

Lighting Efficiency

Normal:65-85lm/w
Custom:90-110lm/w

