

Creative and Professional Lighting Solution

*PRODUCT
CATALOG*
2020/2021

GRACION®
Illuminate the beauty of life

GRACION[®]
Illuminate the beauty of life



COMPANY INTRODUCTION

This is GRACION.

Our success story

GRACION was founded in 1991, today employs nearly 300 workers on 35,000 square meters. The headquarters are located in Guangzhou, with office in Beijing, Hongkong, Shanghai and starting from October 2016 also in Germany.

Success
in the light of our solutions

1991
founding

1999
development of economically efficient products for office lighting: pendant and corridor luminaires

2005
expansion of R&D for LED illumination

2011
the first inhouse developed 50W LED track

spotlight with LED COB Chip enters the market

2012
launch of the COB product series

2015
100 million sold LED luminaires

2016
grand opening
GRACION Europe in Cologne

2017
gradually expand the European market and set up wholesales Channel agent storage system

2018
stronger relationships with dealers in Europe (Spain, Eastern Europe)

2019
further grow its success in SMART RETAIL lighting industry.

Experience that shapes.

Service from a single source

From a classic Original Equipment Manufacturer to an innovation driving force:
We know the technical and qualitative requirements of the market and can adjust to any need.

German standards are our norm – all our OEM products have been certified;
Our structure allows us to offer a suitable balance between modern lighting design and economic accessibility;
Our constant research strives to ensure technical advancements.

Quality that satisfies.

Reliance in every respect

- Innovative and certificate-conform production through OEM experience
 - Over 100 patents documentthe way, fully automatic production
 - ENEC-certified drivers and chips without performance loss
 - Specific thermo-management, allowing 5-7 years of warranty
-

Illumination that creates trust.

Our global network

Over 25 years of experience as well as renown and international credentials pave the way from a classic OEM to an innovation driving force.

GRACION offers lighting concepts for all industries:


- Fashion
- Food
- Automobile
- Retail
- Hotel
- Object areas
- Living areas



01 Light colours

GRACION CCT

GRACION LED luminaires are available with following standard light CCT:

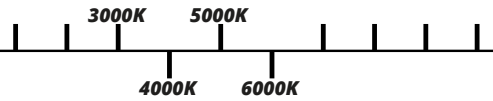

Custom order CCT : 2700K,3500K,5000K,6000K



GRACION Special Colour

The colour of goods is one of the most effective means of sales in the retail space, especially in supermarkets. where the main objective is to promote sales and improve the profitability of services, objects or both. As lighting service provider, Gracion try to create an image that attracts potential customers. We know colour is considered to be the main factor to obtain strong emotion and visual impact.

By the use of GRACION special LED modules, meat products, baked goods, fish or fruits and vegetables are individually illuminated, ensures that the fresh foods on show look appetising, and reduced heat radiation keeps them fresher, longer.



-  **FI= Fish colour**
-  **V= Vegetable colour**
-  **FR= Fruit colour**
-  **B= Bakery colour**
-  **FM= Fresh meat colour**



"honest" use of light, not "embellishment"

02 Colour rendition

GRACION uses the IES TM-30-15 system

The Technical Memorandum, TM-30-15, the new method published by IES in 2015 and has been proposed to the CIE. This new colour evaluation function is expected to provide the angle of technological innovation for light source measuring, furthermore, it can help users analyze the colour characteristics of the modern and the traditional solid-state light source, and thus enhance the fairness and accuracy of the measurement.

Since its appearance in 2015, GRACION operates accordingly to IES TM-30-15.

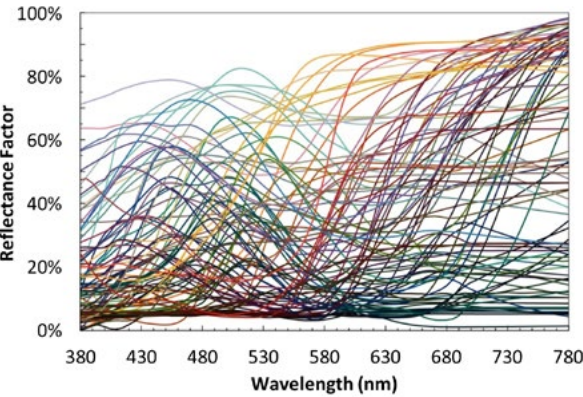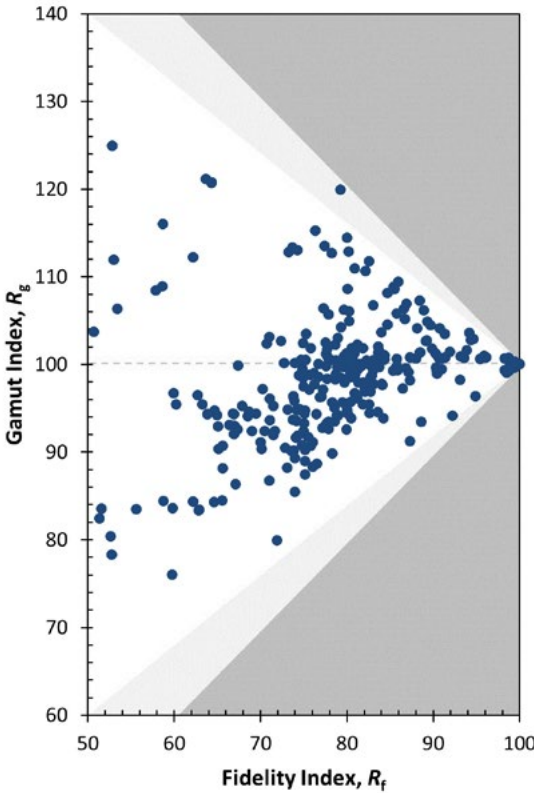

HIGH-TECH

03 High CRI

GRACION focus on light quality

CRI (colour rendering index) is a measure of how accurately a light source illuminates objects’ true colours. GRACION LED lights have CRI values of up to 99, indicating that our LED lights are able to produce white light that approximates halogen or incandescent lighting and natural daylight.




- Ra = 90 - 100 Excellent colour rendering properties
- Ra = 80 - 90 Good colour rendering properties
- Ra = 60 - 80 Moderate colour rendering properties
- Ra < 60 Poor colour rendering properties

PLACE OF APPLICATION	Colour REDNERING INDEX
Museum	CRI ≥ 95
High fashion,jewelry	CRI ≥ 90
Fresh food	CRI ≥ 90
Greneral goods	CRI ≥ 80
Public space of shopping space	CRI ≥ 80
Wearhouse,parking area	CRI ≥ 70


04 Beam control

Master precise light control technology

Choosing the right beam angle of LED lights is very important for any lighting project. With the cooperation of the top optical design companies and the use of advanced optical design systems,GRACION developed optical products with high light distribution accuracy and uniform illumination.GRACION products diffusers precisely shape, control and distribute light,allows a variety of circular light patterns, and a wide standard rectangular angles are available.

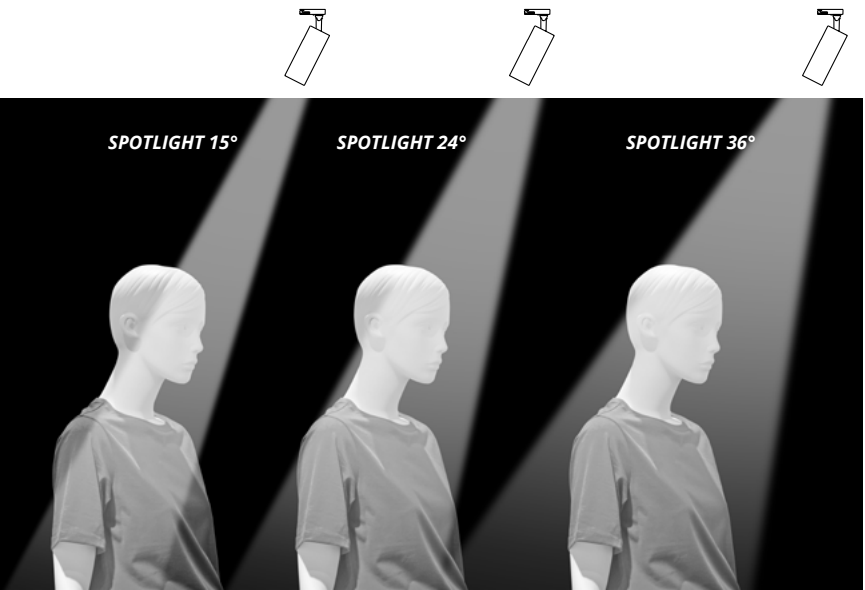

Please see GRACION beam angle classification below

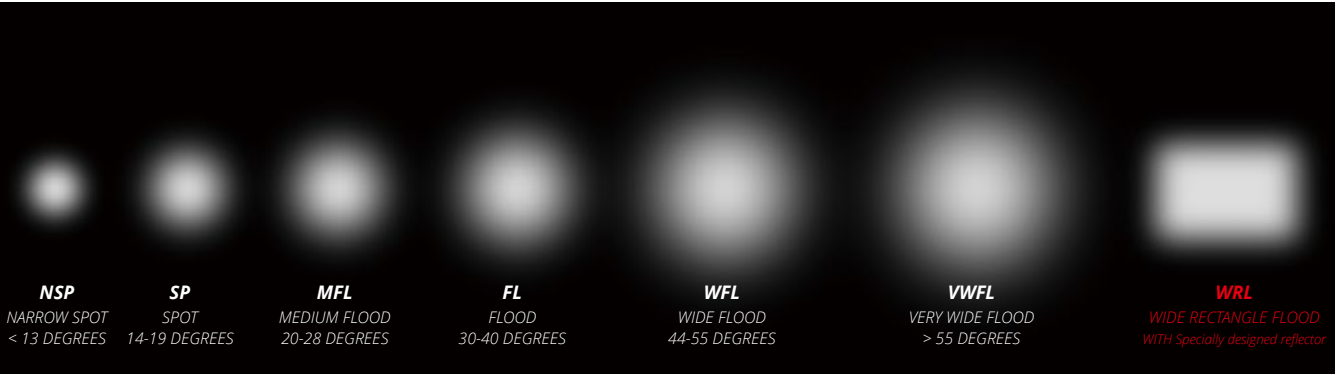


PRODUCT

OVERVIEW

PRODUCT OVERVIEW



TRACK SPOTLIGHT

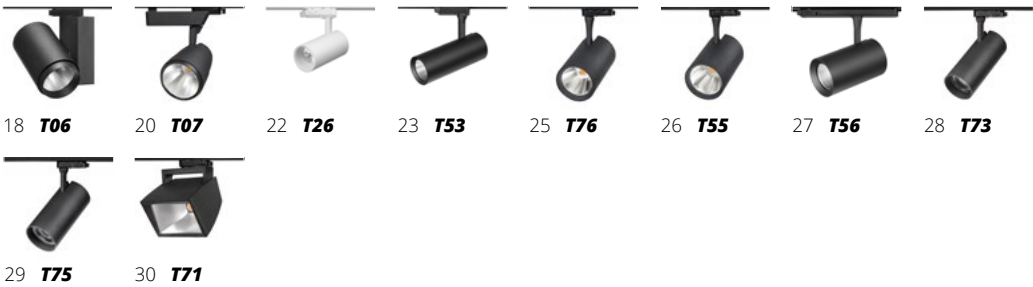

RECESSED SPOTLIGHT




DOWNLIGHT



DOME LIGHT & DROPLIGHT



LINEAR LIGHT

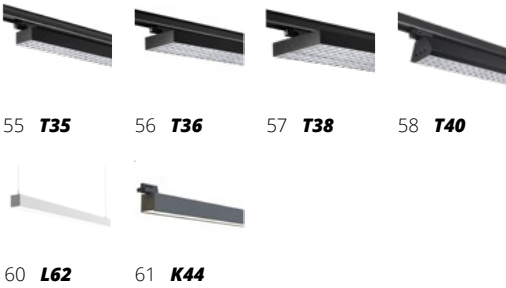

PANEL LIGHT





TRACK SPOTLIGHT

GRACION Track Spotlights represent innovative LED technology based on high-quality die-cast aluminum.

The light heads are equipped with cooling ribs and an excellent thermal management system with a guaranteed durability of high quality of light.

Various designs are available (rotatable and pivotable), depending on the desired lighting positioning, beam angle and wattages. Diverse light colours possibilities make GRACION LED Track Spotlights a versatile product with excellent design.

T06

TRACK SPOTLIGHT

HIGH
EFFICIENCY

Innovative & Efficient

●○

be available in black, white.



Input Voltage : 220-240V~ 50/60Hz

CE

LED

IP20

System watt	CCT	Luminous flux	Efficiency	CRI	Beam
26W	3000K / 4000K	2900 lm - 3500 lm	up to 134 lm/W	85/90	MFL / FL / WFL
35W	3000K / 4000K	3800 lm - 4500 lm	up to 128 lm/W	85/90	MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95



T07

TRACK SPOTLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz

CE

LED

IP20

Household

RoHS

Energy

Recycling

RoHS

System watt	CCT	Luminous flux	Efficiency	CRI	Beam
26W	3000K / 4000K	2900 lm - 3700 lm	up to 138 lm/W	85/90	MFL / FL / WFL
35W	3000K / 4000K	3900 lm - 4600 lm	up to 131 lm/W	85/90	MFL / FL / WFL

Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95



T26

TRACK SPOTLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
8W	3000K / 4000K	950 lm - 1000 lm	up to 105 lm/W	80/90	SP / MFL / FL

Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: CRISP COLOUR CRI95

T53

TRACK SPOTLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
15W	3000K / 4000K	1500 lm - 1700 lm	up to 115 lm/W	80/90	SP / MFL / FL
20W	3000K / 4000K	2100 lm - 2300 lm	up to 115 lm/W	80/90	SP / MFL / FL

Custom order CCT : 2700K,3500K,5000K,6000K




T76

TRACK SPOTLIGHT

HIGH
EFFICIENCY

Innovative & Efficient

be available in black, white.

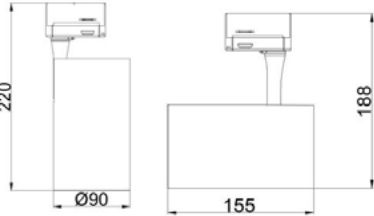

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
26W	3000K / 4000K	2800 lm - 3400 lm	up to 130 lm/W	85/90	MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

T55

TRACK SPOTLIGHT



●○ be available in black, white.

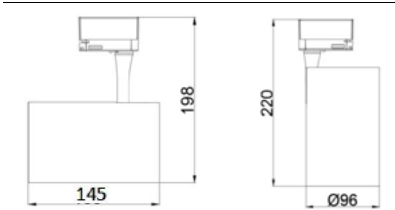

Input Voltage : 220-240V~ 50/60Hz

CE

LED

IP20

Household

RoHS

Energy

Recycle

RoHS

System watt	CCT	Luminous flux	Efficiency	CRI	Beam
35W	3000K / 4000K	3800 lm - 4500 lm	up to 128 lm/W	85/90	MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

T56

TRACK SPOTLIGHT



●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz

CE

LED

IP20

Household

RoHS

Energy

Recycle

RoHS


System watt	CCT	Luminous flux	Efficiency	CRI	Beam
42W	3000K / 4000K	4200 lm - 5000 lm	up to 120 lm/W	85/90	MFL / FL / WFL

Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

T73

TRACK SPOTLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT	Luminous flux	Efficiency	CRI	Beam
25W	3000K / 4000K	2600 lm - 2900 lm	up to 116 lm/W	90	SP / MFL / FL

Custom order CCT : 2700K,3500K,5000K,6000K

T75

TRACK SPOTLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT	Luminous flux	Efficiency	CRI	Beam
25W	3000K / 4000K	2700 lm - 2900 lm	up to 116 lm/W	90	SP / MFL / FL
32W	3000K / 4000K	3600 lm - 3700 lm	up to 116 lm/W	90	MFL / FL

Custom order CCT : 2700K,3500K,5000K,6000K

T71

TRACK SPOTLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT	Luminous flux	Efficiency	CRI	Beam
32W	3000K / 4000K	3600 lm - 4500 lm	up to 140 lm/W	85/90	WRL

Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95



RECESSED SPOTLIGHT

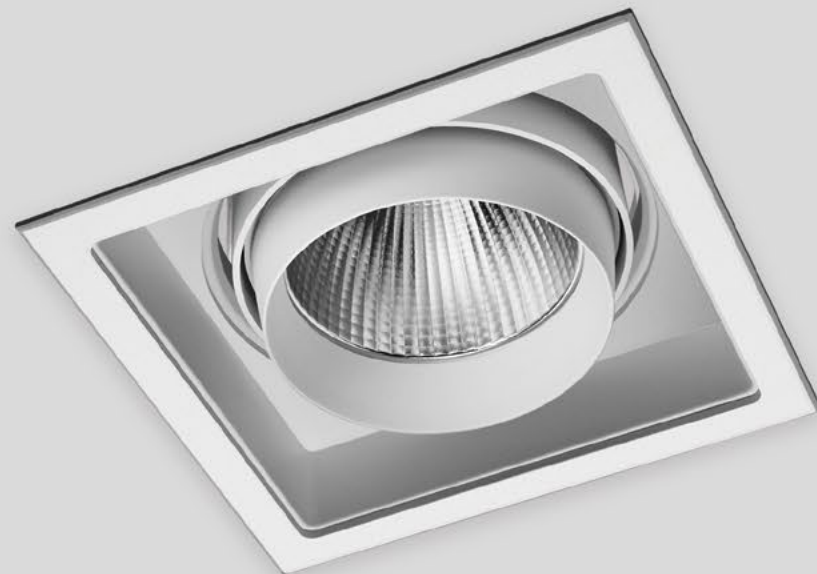

GRACION recessed spotlights are also part of the innovative LED technology with a GRACION thermal management system. This system guarantees a long service life with high quality of light.


With the addition of GRACION designed reflector technology, the products not only achieve a high efficiency, but also enable their usage in various areas.




R30

RECESSED SPOTLIGHT  Cutting Dimension: Ø155mm

●○ be available in black, white.

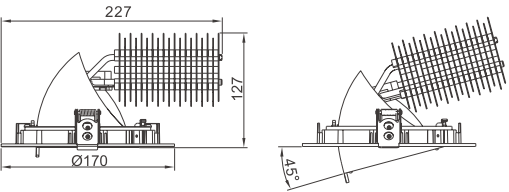

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	90/95	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	90/95	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

R54


RECESSED SPOTLIGHT

 Cutting Dimension: Ø150mm

●○ be available in black, white.

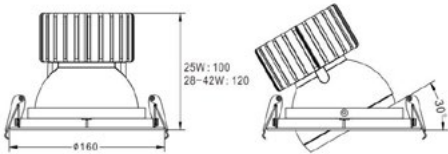

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

R55


RECESSED SPOTLIGHT

 Cutting Dimension: Ø125mm

●○ be available in black, white.

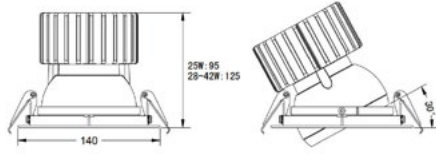

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

R65

RECESSED SPOTLIGHT

 Cutting Dimension: Ø170mm

●○ be available in black, white.

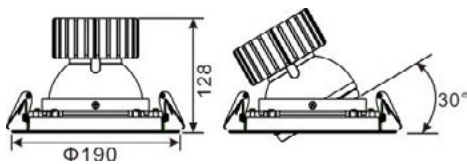

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

R66

RECESSED SPOTLIGHT

 Cutting Dimension: Ø190mm

●○ be available in black, white.

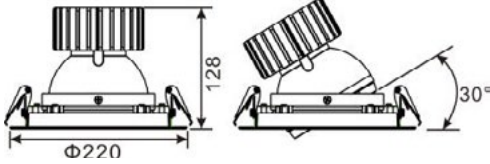

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL

Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

R56

RECESSED SPOTLIGHT

 Cutting Dimension: Ø150mm

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K

R44

RECESSED SPOTLIGHT

 Cutting Dimension: 150mm*150mm

●○ be available in black, white.

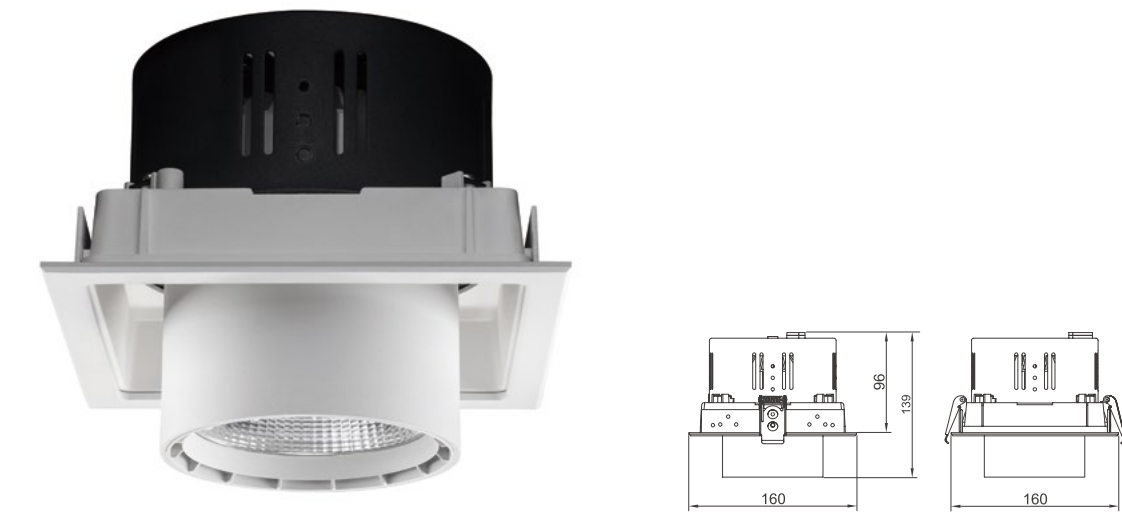

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K

R45


RECESSED SPOTLIGHT

Cutting Dimension: 295mm*150mm

●○ be available in black, white.

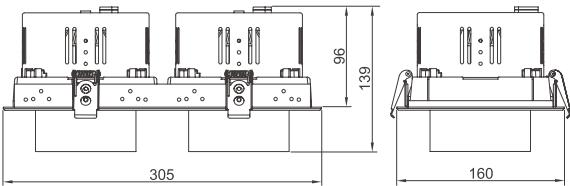

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
2*28W	3000K / 4000K	6000 lm - 7200 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
2*36W	3000K / 4000K	6600 lm - 9000 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K

R46


RECESSED SPOTLIGHT

Cutting Dimension: 440mm*150mm

●○ be available in black, white.

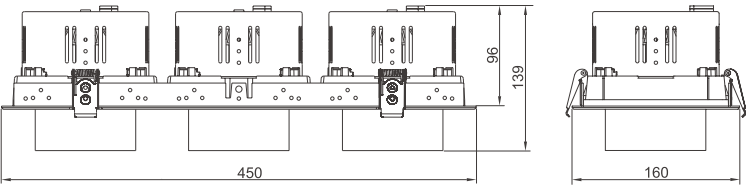

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
3*28W	3000K / 4000K	9000 lm - 10800 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
3*36W	3000K / 4000K	9900 lm - 13500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL

Custom order CCT : 2700K,3500K,5000K,6000K




R85


RECESSED SPOTLIGHT

Cutting Dimension: 150mm*150mm

●○ be available in black, white.

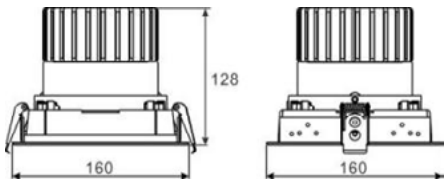

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3000 lm - 3600 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
36W	3000K / 4000K	3300 lm - 4500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL


Custom order CCT : 2700K,3500K,5000K,6000K

R86

RECESSED SPOTLIGHT

Cutting Dimension: 295mm*150mm

●○ be available in black, white.

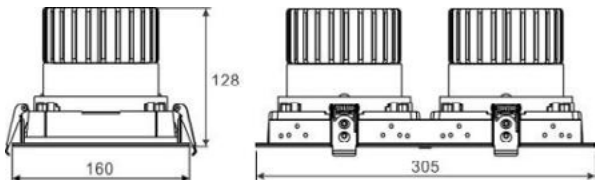

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
2*28W	3000K / 4000K	6000 lm - 7200 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
2*36W	3000K / 4000K	6600 lm - 9000 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL



Custom order CCT : 2700K,3500K,5000K,6000K

R87

RECESSED SPOTLIGHT

Cutting Dimension: 440mm*150mm

●○ be available in black, white.

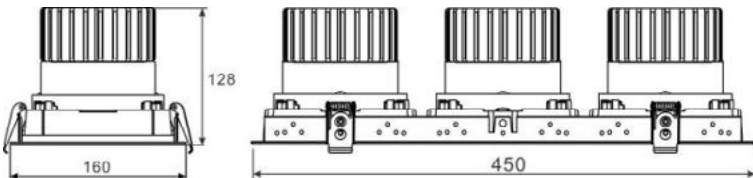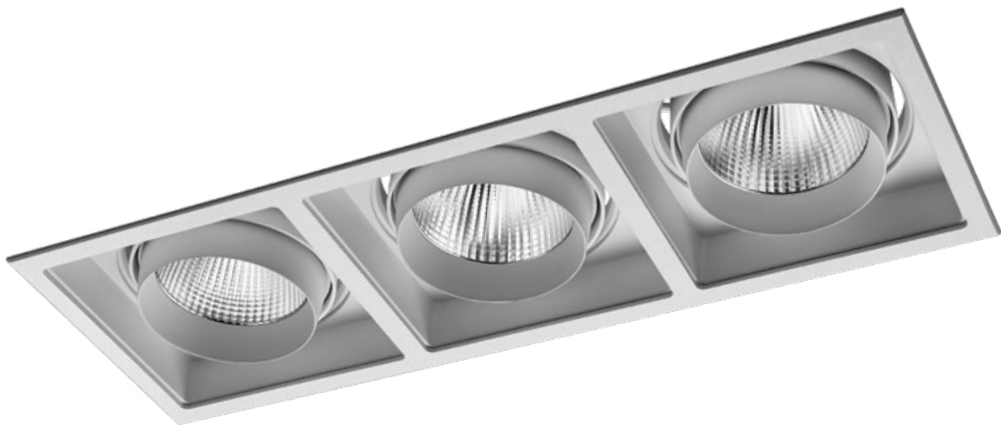

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
3*28W	3000K / 4000K	9000 lm - 10800 lm	up to 128 lm/W	80/90	SP / MFL / FL / WFL
3*36W	3000K / 4000K	9900 lm - 13500 lm	up to 125 lm/W	80/90	SP / MFL / FL / WFL

Custom order CCT : 2700K,3500K,5000K,6000K

DOWNLIGHT

R32 DOWNLIGHT

Cutting Dimension: Ø125mm

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
10W	3000K / 4000K	1050 lm - 1100 lm	up to 110 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K

R33


DOWNLIGHT

Cutting Dimension: Ø150mm

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
14W	3000K / 4000K	1600 lm - 1750 lm	up to 125 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K

R34


DOWNLIGHT

Cutting Dimension: Ø175mm

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
20W	3000K / 4000K	2350 lm - 2500 lm	up to 125 lm/W	80	VWFL
30W	3000K / 4000K	3550 lm - 3800 lm	up to 127 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K

R35


DOWNLIGHT

 Cutting Dimension: Ø205mm

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
26W	3000K / 4000K	3250 lm - 3450 lm	up to 132 lm/W	80	VWFL
40W	3000K / 4000K	4900 lm - 5250 lm	up to 131 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K




LINEAR
LIGHT


T35

LINEAR LIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT	Luminous flux	Efficiency	CRI	Beam
30W	3000K / 4000K	4500 lm - 4700 lm	up to 156 lm/W	80	single asymmetric double asymmetric/60°/90°
50W	3000K / 4000K	7000 lm - 7300 lm	up to 146 lm/W	80	single asymmetric double asymmetric/60°/90°

Custom order CCT : 2700K,3500K,5000K,6000K


T36

LINEAR LIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
30W	3000K / 4000K	4500 lm - 4700 lm	up to 156 lm/W	80	single asymmetric double asymmetric/60°/90°
50W	3000K / 4000K	7000 lm - 7300 lm	up to 146 lm/W	80	single asymmetric double asymmetric/60°/90°

Custom order CCT : 2700K,3500K,5000K,6000K

T38

LINEAR LIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT	Luminous flux	Efficiency	CRI	Beam
52W	3000K / 4000K	7500 lm - 7800 lm	up to 150 lm/W	80	single asymmetric double asymmetric/60°/90°
65W	3000K / 4000K	8800 lm - 9300 lm	up to 143 lm/W	80	single asymmetric double asymmetric/60°/90°

Custom order CCT : 2700K,3500K,5000K,6000K


T40

LINEAR LIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
30W	3000K / 4000K	4500 lm - 4700 lm	up to 156 lm/W	80	single asymmetric double asymmetric/60°/90°
50W	3000K / 4000K	7000 lm - 7300 lm	up to 146 lm/W	80	single asymmetric double asymmetric/60°/90°



Custom order CCT : 2700K,3500K,5000K,6000K




L62

LINEAR LIGHT

●○ be available in black, white.

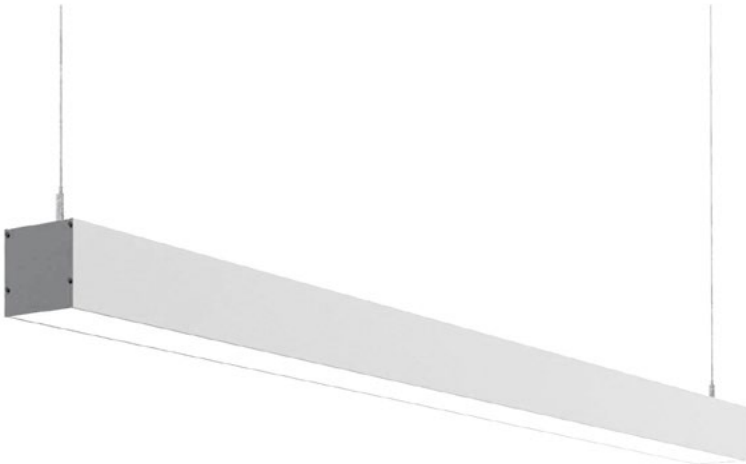

Input Voltage : 220-240V~ 50/60Hz





System watt	CCT	Luminous flux	Efficiency	CRI	Beam
32W	3000K / 4000K	3050 lm - 3210 lm	up to 100 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K


K40

LINEAR LIGHT

●○ be available in black, white.

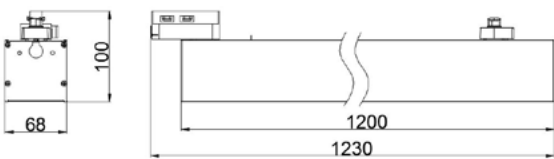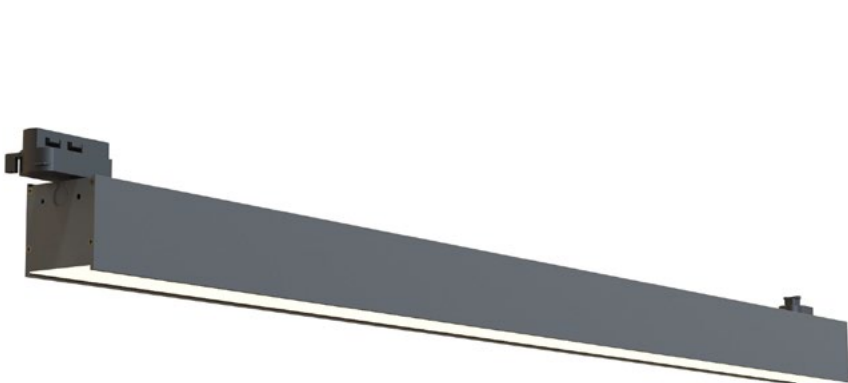

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
32W	3000K / 4000K	3050 lm - 3210 lm	up to 100 lm/W	80	VWFL


Custom order CCT : 2700K,3500K,5000K,6000K




DOME LIGHT
 &
 DROPLIGHT

C04
 DOME LIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3700 lm - 3800 lm	up to 136 lm/W	80	VWFL
36W	3000K / 4000K	4200 lm - 4550 lm	up to 126 lm/W	80	VWFL
42W	3000K / 4000K	5150 lm - 5250 lm	up to 125 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K
 Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95


P07

DROPLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
28W	3000K / 4000K	3700 lm - 3800 lm	up to 136 lm/W	80	VWFL
36W	3000K / 4000K	4200 lm - 4550 lm	up to 126 lm/W	80	VWFL
42W	3000K / 4000K	5150 lm - 5250 lm	up to 125 lm/W	80	VWFL

Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

P03

DROPLIGHT

●○ be available in black, white.



Input Voltage : 220-240V~ 50/60Hz



System watt	CCT	Luminous flux	Efficiency	CRI	Beam
42W	3000K / 4000K	4250 lm - 4400 lm	up to 105 lm/W	90	VWFL
56W	3000K / 4000K	5550 lm - 6050 lm	up to 108 lm/W	90	VWFL


Custom order CCT : 2700K,3500K,5000K,6000K
Special Colour: FI/V/FR/B/FM,CRISP COLOUR CRI95

PANEL
LIGHT

P44

PANEL LIGHT

●○ only be available in white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT (min-max.) & Colour	Installation form	CRI	Dimmable
20W	4000K / Optionally (RGB)	Wall / Ceiling / Suspension	80	Optionally (Dimmable)

P45

PANEL LIGHT

☒ ☐ only be available in white.



Input Voltage : 220-240V~ 50/60Hz




System watt	CCT (min-max.) & Colour	Installation form	CRI	Dimmable
25W	4000K / Optionally (RGB)	Wall / Ceiling / Suspension	80	Optionally (Dimmable)

P46

PANEL LIGHT

☒ ☐ only be available in white.

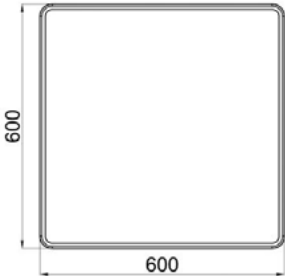

Input Voltage : 220-240V~ 50/60Hz



System watt	CCT (min-max.) & Colour	Installation form	CRI	Dimmable
35W	4000K / Optionally (RGB)	Wall / Ceiling / Suspension	80	Optionally (Dimmable)



Success in the light of our solutions

***Grant on all products
we have a 5 year guarantee!***

All technical details as well as weights and measurements have been taken with great care. Subject to deviations.
All dimensions in mm. LED service life L80 / B20 at an ambient temperature of (ta) 25 ° C. Declared lifespan 50,000h. Luminous flux and efficiency data are subject to a tolerance of +/- 10%. CRI Ra> 80 /> 90. Product images serve as a reference and may differ from the original. Changes are reserved in the course of technical progress and further development.
As of 01/2020.

GRACION®

GUANGZHOU GRACION LIGHTING CO.,LTD

Address: South Xinghe 5th RD, 1st Industry Area of Taihe,
Baiyun District, Guangzhou, China

Zip code: 510540

E-mail: gracion@gracion.com.cn
www.gracion.com.cn

GRACION EUROPE GMBH

Poppelsdorfer Allee 104
D-53115 Bonn

Tel +49 (0)228 35067961
+49 (0)228 90849318
+49 (0)228 90849319
Fax +49 (0)228 35067961

www.gracion-europe.com